



Filters

Filters for Swimming Pools



Clean & Clear® Plus Filters

Fiberglass Reinforced Polypropylene Tank



Clean & Clear Plus Filter



Featured Highlights

- NSF listed
- Superior strength
- Large filter area for increased dirt capacity
- 1-1/2 in., 100% drain clean-out port
- Continuous High Flow™ internal air relief*
- Base and plumbing kits now available
- Injection molded tank
- Balanced hydraulic flow
- Tension Control™ clamp
- 100% factory tested
- Black bulkhead unions
- High Flow manual air relief valve

Clean & Clear® Plus Filters have a corrosion resistant injection molded filter tank featuring superior strength and reliability. The cartridge assembly uses four easy to clean, non-woven, polyester cartridges. Each filter is supplied with a bulkhead union set for easy installation.

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate ² (GPM Res)	Flow Rate ³ (GPM Comm)	Turnover Capacity (In Gallons)			Carton Qty.	Carton Wt. (Lbs.)
					8 Hour	10 Hour	12 Hour		
CLEAN & CLEAR PLUS FILTERS									
160310	CCP240	240	90	90	43,200	54,000	64,800	1	60
160340	CCP320 ¹	320	120	120	57,600	72,000	86,400	1	70
160301	CCP420 ¹	420	150	150	72,000	90,000	108,000	1	80
160332	CCP520 ¹	520	150	150	72,000	90,000	108,000	1	90

¹ NSF Listed.

³ Commercial rate is a maximum of .375 GPM sq. ft. of filter area.

² Residential rate .375 GPM per sq. ft. of filter area.

Dimensions and Performance




Listed

Note: Actual system flow will depend on plumbing size and other system components.

Note: Pentair Pool Products does not recommend flow rates above 150 GPM.

* Integrated continuous High Flow internal air relief is operational only when there is unobstructed flow in the circulating system.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

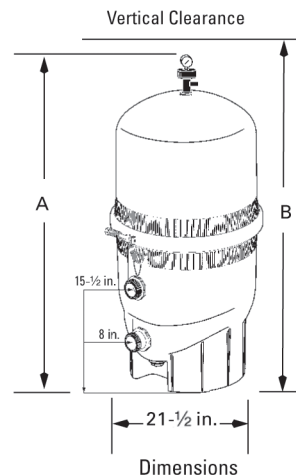

Model	A Dim.	B Dim.
160310	37"	56"
160340	43"	62"
160301	49"	68"
160332	56"	74"

See page 322 for replacement parts.

Clean & Clear® Filters

Fiberglass Reinforced Polypropylene Tank



Featured Highlights

- NSF listed
- Unionized connections
- Integrated continuous High Flow™ internal air relief*
- Chemical resistant tank body
- Lock ring with spring-loaded safety latches
- Coreless cartridge for easy cleaning
- High Flow manual air relief valve
- 1 in. drain and wash out
- Single piece base and body design



Clean & Clear Filter


The Clean & Clear® Filter features a chemical resistant tank with no-tool servicing and a coreless cartridge for easier cleaning. All models are equipped with easy spin-on unions for plumbing hook-ups. These filters are NSF listed, and are available in 50, 75, 100, 150, and 200 square foot sizes.

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate ¹ (GPM Res)	Flow Rate ² (GPM Comm)	Turnover Capacity (In Gallons)			Carton Qty.	Carton Wt. (Lbs.)
					8 Hour	10 Hour	12 Hour		
CLEAN & CLEAR FILTERS									
160314	CC 50	50	50	19	24,000	30,000	36,000	1	15
160315	CC 75	75	75	28	36,000	45,000	54,000	1	26
160316	CC 100	100	100	38	48,000	60,000	72,000	1	33
160317	CC 150	150	150	56	72,000	90,000	108,000	1	35
160318	CC 200	200	150	75	72,000	90,000	108,000	1	35

¹ One GPM per sq. ft. shown recommended flow rate .5 GPM per sq. ft.

² Commercial rate is a maximum of .375 GPM per sq. ft. of filter area.

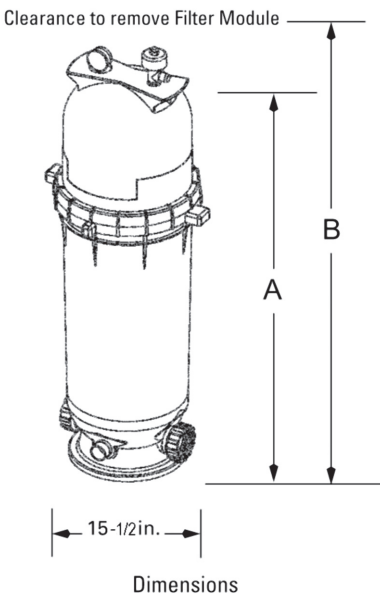

Listed

Dimension Table

Model	A Dim.	B Dim.
160314	18"	30"
160315	25-1/2"	39"
160316	33"	61"
160317	40-1/2"	76"
160318	40-1/2"	76"

Dimensions and Performance

Note: Actual system flow will depend on plumbing size and other system components.

Note: Pentair Pool Products does not recommend flow rates above 150 GPM.

* Integrated continuous High Flow internal air relief is operational only when there is unobstructed flow in the circulating system.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

See page 323 for replacement parts.

Dynamic® Series Filters

For Spas, Hot Tubs and Swimming Pools



Dynamic Series Filters



Featured Highlights

- Free standing base optional on all but DSC models
- All cartridges are manufactured of the finest quality filter media

The Dynamic® Series Filter line includes in-line, top load, safety flange lily pad and safety skim filters with automatic chemical dispensers and a host of features created for the leading spa manufacturers throughout the country.

Ordering Information


Product	Model	Description	Effective Filtration Area (Sq. Ft.)	Max GPM	Plumbing Size	Filter Dimensions		Carton Qty.	Carton Wt. (Lbs.)
						Height	Diameter		
DYNAMIC SERIES II TOP LOAD 2 in. HIGH FLOW FILTERS									
R172502J	RTL 25	Slip, 3 oz. cartridge	25	100	2 in. socket	18 in.	8-1/4 in.	4	27
R172503	RTL 75	Slip, 3 oz. cartridge	75	100	2 in. socket	25 in.	8-1/4 in.	4	30
R172504B	RTL 50	Slip, 3 oz. cartridge	50	100	2 in. socket	18 in.	8-1/4 in.	4	28
R172505	RTL 100	Slip, 3 oz. cartridge	100	100	2 in. socket	31-1/2 in.	8-1/4 in.	4	32
DYNAMIC SERIES III TOP LOAD 2 in. HIGH FLOW FILTERS WITH CHLORINE/BROMINE DISPENSERS									
R172523	RCF 25	Slip, 3 oz. cartridge	25	100	2 in. socket	18 in.	8-1/4 in.	4	28
R172535	RCF 50	Slip, 3 oz. cartridge	50	100	2 in. socket	18 in.	8-1/4 in.	4	30
R172503C	RCF 75	Slip, 3 oz. cartridge	75	100	2 in. socket	25 in.	8-1/4 in.	4	32
R172505C	RCF 100	Slip, 3 oz. cartridge	100	100	2 in. socket	31-1/2 in.	8-1/4 in.	4	34
DYNAMIC SERIES IV FLOATING LILY PAD WEIR FILTERS ¹									
R172545	DFM 50	Low profile (no weir) short basket	50	100	2 in. socket	17-1/2 in.	8-1/2 in.	4	26
R172664	DFML 25	Lily pad weir, lock ring mount	25	100	2 in. socket	19-3/8 in.	8-1/2 in.	4	27
R172666	DFML 25C	Compact, (not available with dispenser)	25	100	2 in. socket	12-7/8 in.	8-1/2 in.	4	22
R172668	DFML 25	With chlorine/bromine dispenser	25	100	2 in. socket	19-3/8 in.	8-1/2 in.	4	28
R172670	DFML 35	Lily pad weir, lock ring mount	35	100	2 in. socket	15-1/2 in.	8-1/2 in.	4	24
R172674	DFML 50	Lily pad weir, lock ring mount	50	100	2 in. socket	19-3/8 in.	8-1/2 in.	4	28
DYNAMIC SERIES IV SAFETY FLANGE FLOATING LILY PAD WEIR FILTERS ²									
R172666X	DFML 25C	Compact, (not available with dispenser)	25	100	2 in. socket	12-7/8 in.	8-1/2 in.	4	22
R172670X	DFML 35	Lily pad weir, lock ring mount	35	100	2 in. socket	15-1/2 in.	8-1/2 in.	4	24
R172674X	DFML 50	Lily pad weir, lock ring mount	50	100	2 in. socket	19-3/8 in.	8-1/2 in.	4	28
DYNAMIC SERIES IV SAFETY SKIM FILTERS									
R172554M	DSF 35	Slip, 3 oz. cartridge (add face plate kit no.)	35	60	2 in. socket	24-1/8 in.	9-1/2 in.	4	32
R172551	DSF 50	Slip, 3 oz. cartridge (add face plate kit no.)	50	100	2 in. socket	29 in.	9-1/2 in.	4	36
SAFETY FACE PLATE KIT ¹									
R172555WH		Safety face plate kit, white						4	5
SAFETY WALL SKIMMER ³									
R172570	SWS	Safety wall skimmer only, (add face plate kit no.) complete with diverter plate, vacuum plate and 90 degree adapter						1	5

Dynamic® Series Filters (Cont'd)

Product	Description	Carton Qty.	Carton Wt. (Lbs.)
ACCESSORIES FOR DYNAMIC II, III, IV, V FILTERS			
R172452	Free standing base for Dynamic Series II and III Filters	Bulk	
R172540	Chlorine/Bromine Dispenser for Dynamic Series II and III Filters	Bulk	
R172560	Chlorine/Bromine Dispenser for Dynamic Series IV Skim Filter	Bulk	
R172562	Chlorine/Bromine Dispenser w/basket for DFM 50	Bulk	
R172662	Chlorine/Bromine Dispenser w/basket for DFML 25, 35, 50	Bulk	
R172691DGK	Safety flange kit, dark grey	Bulk	
R172691SK	Safety flange kit, sterling silver	Bulk	
FILTER NICHE AND COVER FOR DYNAMIC SERIES II AND III FILTERS			
R172542BLK	Black	4	6
R172542SS	Sterling silver	4	6
R172542WH	White	4	6
FILTER NICHE COVER ONLY			
R172611BK	Black	Bulk	
R172611SS	Sterling silver	Bulk	
R172611WH	White	Bulk	

Note: Niche covers can be imprinted with your company name or logo. Minimum quantity 96 or more. \$35.00 net first run die charge. Add 15¢ to dealer price. Add "i" after order number.

- ¹ All available in white. For sterling silver top add "SS" to order number. For dark grey add "DG."
- ² All available in white. For sterling silver top add "SX" to order number. For dark grey add "DGX."
- ³ When ordering R172551, R172554M or R172570 you must also select a Face Plate Kit.
- ⁴ With filter gauge, add 4-1/4 in. to height.

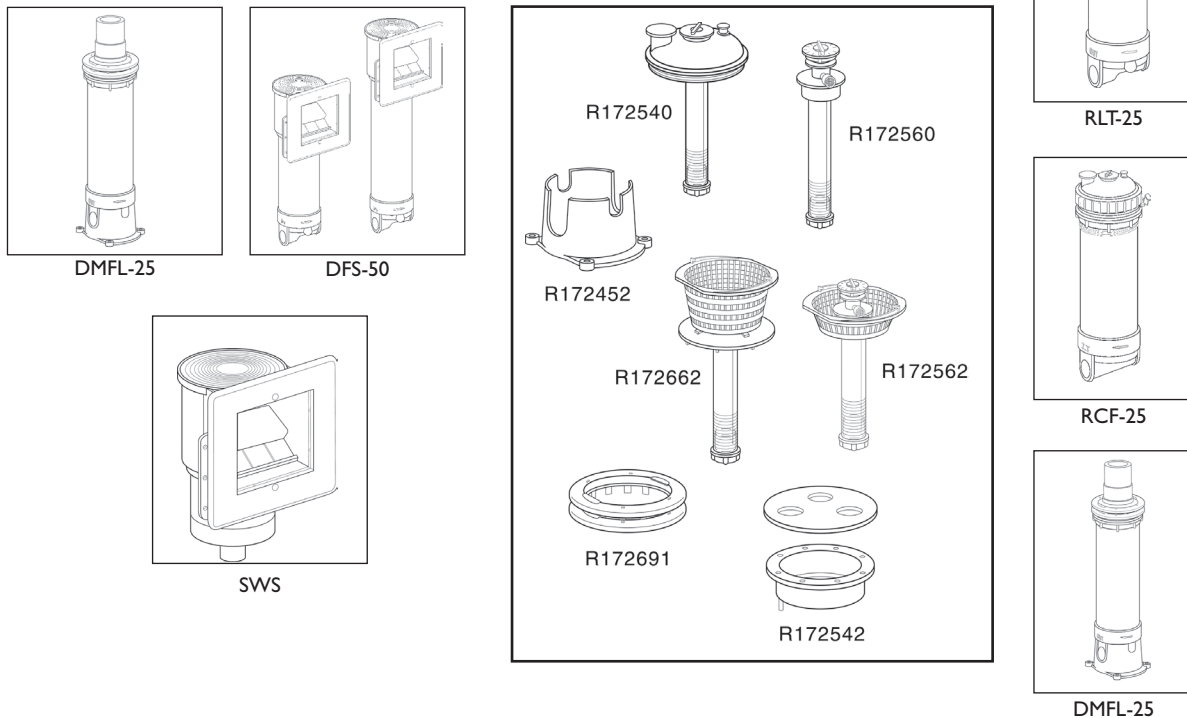

See page 325–330 for replacement parts.

System:3[®] Modular Media Filters

SM Series Filters



System:3 Modular Media Filter
SM Series
Protected by U.S. Patent Number 6,036,853

Featured Highlights

- **Typical Installation** – Inground pools, inground hot tubs, and water features
- **Quality Construction** – Durable two-piece tank housing constructed of Dura-Glas™, Sta-Rite’s industry leading glass reinforced composite resin
- **Safe** – Posi-Lok™ clamps provide safe, easy access to tank internals
- **Patented Design** – The patented, innovative balanced flow design first introduced with the System:3 Mod Media is still the standard of the industry
- **Low Maintenance** – Complete media coverage combined with shallow pleats means greater dirt holding capabilities, resulting in longer filter cycles and less cleaning
- **Quick Service** – The shallow pleat design allows you to simply hose off the elements in a matter of minutes, making servicing a snap
- **Dual Drain Plugs** – Side plug available for plumbing to waste, while the bottom plug will drain entire filter

With the System:3 Modular Media Filter, Sta-Rite brings you the product that makes Ultra-Capacity Filtration™ a reality. No longer simply “cartridges,” Sta-Rite’s advanced technology has brought an entirely new class of filtration to the industry. Sta-Rite’s modular media concept incorporates the latest in media science, perfectly balanced flow, and an integral manifold design: namely, Ultra-Capacity Filtration. This filtration concept puts totally care-free operation within reach of today’s pool owners. Modular Filter Tanks allows for quick change of filter medias without changing the tank. Contemporary style and matte black finish looks attractive in any pool setting.

Ordering Information

Product	Effective Filter Area (Sq. Ft.)	Flow Rated ¹ GPM (Sq. Ft.)	Turnover Capacity (In Gallons) (Flow Rate x 60 x Hours)			Tank Port Size	Carton Wt. (Lbs.)
			6 Hour	8 Hour	10 Hour		
SYSTEM:3 MODULAR MEDIA FILTER - SM SERIES							
S7M120	300	50-100	18-36,000	24-48,000	30-60,000	2 in.	120
S7M400 ¹	400	50-115	18-41,000	24-55,000	30-69,000	2 in.	125
S8M150 ¹	450	50-124	18-45,000	24-60,000	30-74,000	2 in.	147
S8M500 ¹	500	50-130	18-46,000	24-62,400	30-78,000	2 in.	150

¹ Based on NSF rated flow range of .333 GPM per square foot for the S7M120, .288 GPM per square foot for the S7M400, .275 GPM for the S8M150 and .26 GPM per square foot for the S8M500.

Note: No backwash valve required.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).


System:3[®] Modular Media Filters (Cont'd)

SM Series Filters

Ordering Information


Product	Description	Carton Wt. (Lbs.)
ACCESSORIES FOR SYSTEM:3 MODULAR MEDIA FILTER - SM SERIES		
PKG 188	Union x 2 in. Slip Adapter - Pkg. of 2	1
PKG 189	Union x 2 in. FPT Adapter - Pkg. of 2	1
77703-0100	Union x 1-1/2 in. FPT Adapter - Pkg. of 2	1
77703-0101	Union x 1-1/2 in. Slip Adapter - Pkg. of 2	1
25021-0200S	100 sq. ft. Inner Replacement Module for S7M120	9
25022-0201S	200 sq. ft. Outer Replacement Module for S7M120	21
25021-0223S	136 sq. ft. Inner Replacement Module for S7M400	11
25022-0224S	264 sq. ft. Outer Replacement Module for S7M400	24
25021-0202S	191 sq. ft. Inner Replacement Module for S8M150	18
25022-0203S	259 sq. ft. Outer Replacement Module for S8M150	27
25021-0224S	209 sq. ft. Inner Replacement Module for S8M500	19
25022-0225S	291 sq. ft. Outer Replacement Module for S8M500	28
25021-0021	Modular Media Conversion Kit - S7M120/S7M400 (Order Modules Separately)	4
25021-0025	Modular Media Conversion Kit - S8M150/S8M500 (Order Modules Separately)	5

Dimensions and Performance

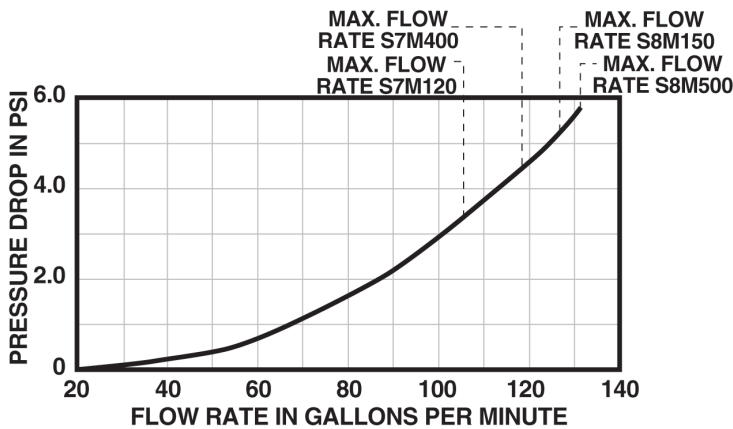

Catalog Number	DIMENSION				
	A	B	C	D	E
S7M120/S7M400	28-1/2	42	7	36	50
S8M150/S8M500	32-1/2	42-1/4	8	40	50

- A = width
 - B = height
 - C = number of clamps
 - D = area (width) needed to take off clamps
 - E = area (height) needed to remove top half of tank
- All dimensions shown in inches.

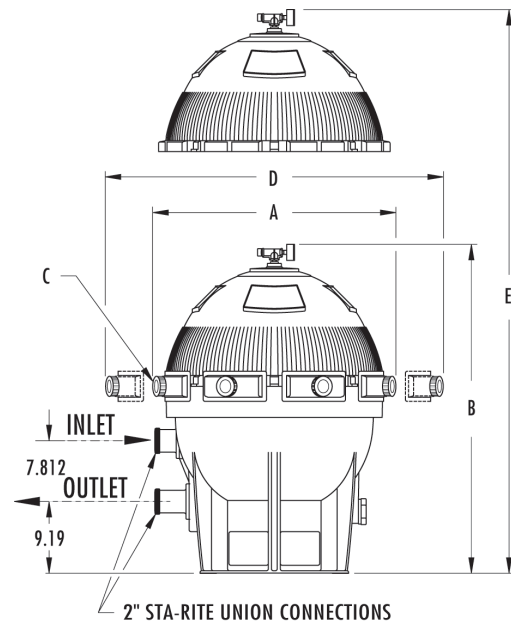

See page 331 for replacement parts.

System:2™ Modular Media Filters

PLM Series Filters



System:2 Modular Media Filters
 PLM Series
 Protected by U.S. Patent Numbers 5,653,831
 and 6,036,853

Featured Highlights

- **Typical Installation** – aboveground pools, inground pools, and inground hot tubs
- **Quality Construction** – Durable two-piece tank housing constructed of rugged ABS thermoplastic to ensure a long-lasting tank life
- **Easy Access** – Posi-Ring® locking ring provides safe, fast access to tank internals
- **Patented Design** – The patented, innovative balanced flow design first introduced with the System:3 Mod Media filter is now available in the smaller System:2 filter, virtually maintenance-free operation for pools of all sizes
- **Low Maintenance** – Complete media coverage combined with shallow pleats means greater dirt holding capabilities, resulting in longer filter cycles and less cleaning
- **Large Drain Plug** – Filter includes 2 in. NPT Drain ports, which are provided with reducer bushing and 1-1/2 in. drain plug

Sta-Rite's modular media filtration is the perfect match for both the inground and aboveground pool markets. Advances in media technology and balanced flow design provide dirt-loading capabilities up to 15 times greater than sand filters of equivalent size. Virtually maintenance-free operation for today's pool owner. The small diameter footprint makes the System:2 filter a perfect fit for new and retrofit installations.

Modular Filter Tanks allows for quick change of filter medias without changing the tank. Contemporary style and matte black finish looks attractive in any pool setting.

Ordering Information

Product	Effective Filter Area (Sq. Ft.)	Flow Rated ¹ GPM (Sq. Ft.)	Turnover Capacity (In Gallons) (Flow Rate x 60 x Hours)			Tank Port Size	Carton Wt. (Lbs.)
			6 Hour	8 Hour	10 Hour		
SYSTEM:2 MODULAR MEDIA FILTER - PLM SERIES							
PLM100	100	38-100	14-36,000	18-48,000	23-60,000	2 in.	41
PLM125	125	47-125	17-45,000	22-60,000	28-75,000	2 in.	42
PLM150	150	56-150	20-54,000	27-72,000	34-90,000	2 in.	43
PLM175	175	66-150	24-54,000	31-72,000	39-90,000	2 in.	44
PLM200	200	75-150	27-54,000	36-72,000	45-90,000	2 in.	45
PLM300	300	113-150	41-54,000	54-72,000	68-90,000	2 in.	53

¹ Based on NSF recommended flow rate for commercial at .375 GPM per square foot.
 Note: No backwash valve required.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).


System:2™ Modular Media Filters (Cont'd)

PLM Series Filters


Ordering Information

Product	Description	Carton Wt. (Lbs.)
ACCESSORIES FOR SYSTEM:2 MODULAR MEDIA FILTER - PLM SERIES		
27002-0100S	100 Sq. Ft. Replacement Module for PLM100	11
27002-0125S	125 Sq. Ft. Replacement Module for PLM125	11.5
27002-0150S	150 Sq. Ft. Replacement Module for PLM150	12
27002-0175S	175 Sq. Ft. Replacement Module for PLM175	13
27002-0200S	200 Sq. Ft. Replacement Module for PLM200	14
27002-0300S	300 Sq. Ft. Replacement Module for PLM 300	19
U78-820P	2 in. x 1-1/2 in. Pipe Reducer Bushing	8 oz.
27001-0130S	Spring Check Valve	1

Dimensions and Performance

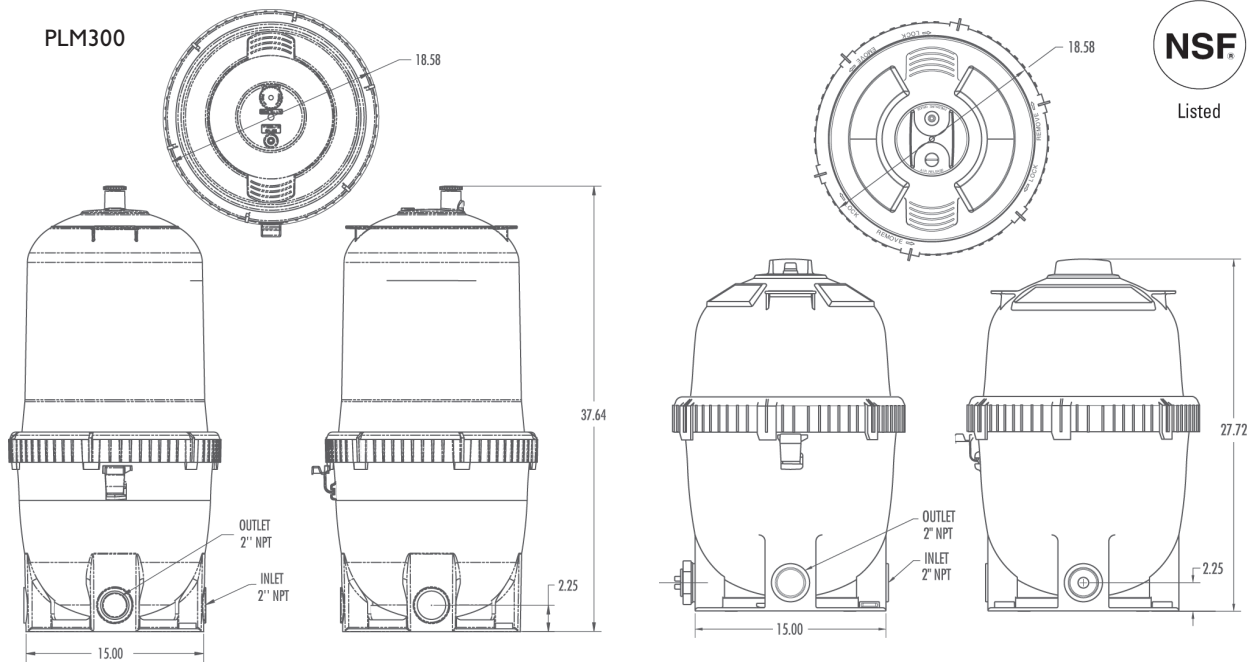

All dimensions shown in inches.

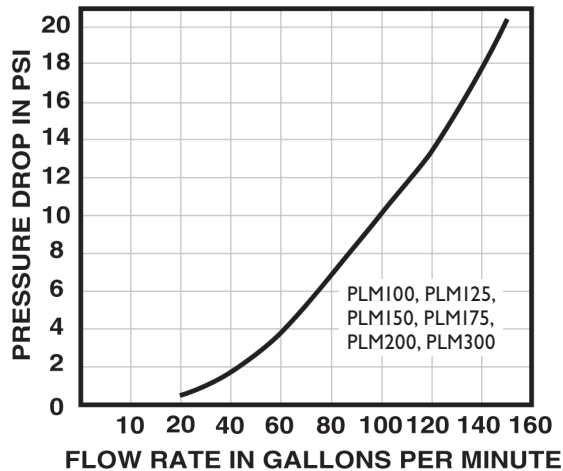

See page 332 for replacement parts.

FNS® Plus Filters

Fiberglass Reinforced Polypropylene Material, Vertical Grid, D.E.



FNS Plus Filter

FNS® Plus filters are fiberglass reinforced polypropylene of advanced chemical resistant materials for superior strength and reliability. The top manifold design features the Service-Ease grid pack for convenient one-at-a-time grid servicing.

Featured Highlights

- Superior strength
- Service-Ease™ grid pack
- Continuous High Flow™ internal air relief*
- 100% factory tested
- Top-to-bottom backwash
- High Flow manual air relief valve
- Tension Control™ clamp
- Black valves and plumbing
- 1-1/2 in. bottom clean out port
- 7-1/2 in. centerline bulkhead fittings

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate ² (GPM)	Turnover Capacity (In Gallons)			D.E. Required (Lbs.)	Carton Qty.	Carton Wt. (Lbs.)
				8 Hour	10 Hour	12 Hour			
FNS PLUS FILTERS									
180006	FNSP24	24	48	23,040	28,800	34,560	2.4	1	60
180007 ¹	FNSP36	36	72	34,560	43,200	51,840	3.6	1	70
180008 ¹	FNSP48	48	96	46,080	57,600	69,120	4.8	1	80
180009 ¹	FNSP60	60	120	57,600	72,000	86,400	6.0	1	90
FNS PLUS VALVE OPTIONS³									
263079	2 in. PVC Slide valve w/o bulkhead fitting							1	3
261049	2 in. HiFlow valve, no plumbing							1	7
261142	2 in. HiFlow valve with plumbing for FNS, FNS Plus, NSP filters							1	11
261152	2 in. MPV, threaded for FNS, FNS Plus, NSP filters							1	10
263064	Push pull valve, 7-1/2 in. Center, Almond PVC							1	6
261177	1-1/2 in. MPV, threaded for FNS, FNS Plus, NSP filters							1	7

¹ NSF Listed.

³ Valves must be purchased separately.

² Flow rate is based on 2.0 GPM per sq. ft. of filter area. Actual system flow will depend on plumbing size and other system components.


Dimensions and Performance



Listed

Dimension Table

Product	A Dim.	B Dim.
180006	37"	48"
180007	43"	62"
180008	49"	74"
180009	55"	86"

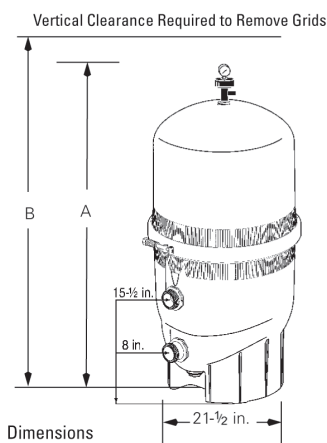

* Integrated continuous High Flow internal air relief is operational only when there is unobstructed flow in the circulating system.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

See pages 337 and 338 for replacement parts.

EasyClean™ Filters

Fiberglass Reinforced Polypropylene Tank



Featured Highlights

- NSF listed
- Unionized connections
- Integrated continuous High Flow™ internal air relief *
- Chemical resistant tank body
- Lock ring with spring-loaded safety latches
- Coreless cartridge for easy cleaning
- High Flow manual air relief valve
- 1 in. drain and wash out
- Single piece base and body design

The EasyClean™ Filter features a chemical resistant tank with no-tool servicing and a coreless cartridge for easier cleaning. All models are equipped with easy spin-on-unions for plumbing hook-ups.



EasyClean Filter

Ordering Information

Model	Effective Filtration Area (Sq. Ft.)	Vertical Clearance ¹	Flow Rate ² (GPM)	D.E. Required	Turnover Capacity (In Gallons)			Carton Qty.	Carton Wt. (Lbs.)
					8 Hour	10 Hour	12 Hour		
EASYSUCCESS FILTERS									
EC60	15	39 in.	60	1.5	28,000	36,000	43,000	1	26
EC90	30	76 in.	90	3.0	43,200	54,000	64,800	1	35

¹ Required clearance to remove filter elements.

² Maximum flow rate.


Dimensions and Performance

Note: Actual system flow will depend on plumbing size and other system components.

Note: Pentair Pool Products does not recommend flow rates above 150 GPM.

* Integrated continuous High Flow internal air relief is operational only when there is unobstructed flow in the circulating system.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

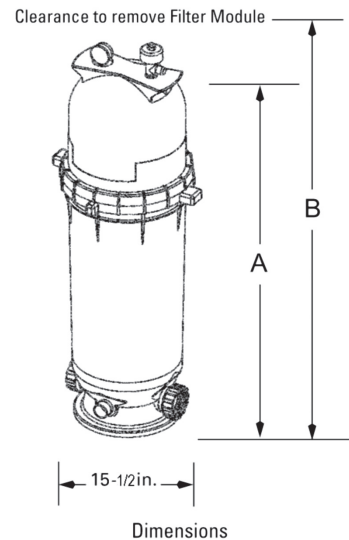

Dimension Table

Model	A Dim	B Dim
188614	25-1/2 in.	39 in.
188615	40-1/2 in.	76 in.

See page 336 for replacement parts.

Quad D.E.[®] Filters

Cartridge Style Filter



Quad D.E. Filter

Protected by U.S. Patent Pending and all corresponding foreign counterparts

Featured Highlights

- Four large-capacity cartridges provide maximum filter surface area for greater dirt-trapping capacity and longer periods between cleanings
- Unique internal flow path ensures optimum filtration and backwashing efficiency
- Chemical resistant, fiberglass reinforced polypropylene tank for exceptional strength and long life
- Easily removable cartridge elements make maintenance fast and easy
- Water flows through the Quad D.E.[®] so efficiently that your pump will use less energy

The Highest Water Clarity with the Lowest Amount of Fuss. Quad D.E.[®] combines the finest filtration available for the most sparkling clear water with the convenience and easy-cleaning features usually found only in a cartridge filter. Four easily accessible and removable D.E. cartridges simplify maintenance and save time.

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM)	Turnover Capacity (In Gallons)			D.E. Required (Lbs.)	Carton Qty.	Carton Wt. (Lbs.)
				8 Hour	10 Hour	12 Hour			
QUAD D.E. FILTERS									
188592	Quad D.E. 60	60	120	57,600	72,000	86,400	6.0	1	70
188593	Quad D.E. 80	80	160	76,800	96,000	115,200	8.0	1	80
188594	Quad D.E. 100	100	160	76,800	96,000	115,200	10.0	1	90
QUAD D.E. VALVE OPTIONS ¹									
261173	1-1/2 in. MPV, for Triton and Quad D.E. filters (SM 10-3)							1	3
263079	2 in. PVC Slide valve w/o plumbing, for D.E. & sand filters							1	7
261049	2 in. HiFlow valve, no plumbing							1	11
261050	2 in. HiFlow w/plumbing, for Triton and Quad D.E. filters							1	10
261055	2 in. MPV, for Triton and Quad D.E. filters (SM 20-3)							1	5
263064	Push pull valve, 7-1/2 in. Center, Almond PVC							1	4
270100	Adaptor Kit (For no valve assembly)							1	


¹ Valves must be purchased separately.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

Dimensions and Performance



QUAD D.E. [®] CARTRIDGE STYLE FILTER									
Recommended Flow Rate									
Product #	Model #	Filter Area Sq. Ft.	Vertical* Clearance	Flow Rate GPM		Res. Turnover Capacity (Gallons)			
				Res.**	Comm.	6 hours	8 hours	12 hours	
188592	Quad 60	60	62"	120	150	43,200	57,600	86,400	
188593	Quad 80	80	68"	160	150	57,600	76,800	115,200	
188594	Quad 100	100	74"	160	150	57,600	76,800	115,200	

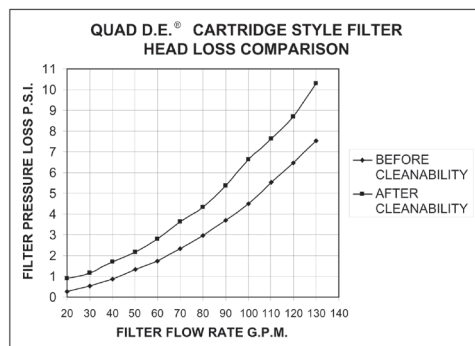

See page 340 for replacement parts.

SMBW 4000 Series™ Filters

Sheet Molded Fiberglass Tank with Backwash Valves



Featured Highlights

- Maximum Operating Pressure 50 psi
- Corrosion-resistant 20 in. diameter fiberglass filter tank for strength and durability
- Unique Spiro-Mite grid design provides high efficiency filtration and longer filter cycles
- Exclusive clamp ring design is proven to be safe, strong and reliable. It allows for quick and easy access to internal components
- 2 in. plumbing connections provide maximum flow



SMBW 4000 Series Filter


Sheet molded fiberglass tank, 2 in. threaded female connections with Noryl® rotary backwash valve.

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM)	Turnover Capacity (In Gallons)			D.E. Required (Lbs.)	Carton Qty.	Carton Wt. (Lbs.)
				8 Hour	10 Hour	12 Hour			
SMBW 4000 FILTERS WITH BACKWASH VALVE									
011555	SMBW 4048	47	94	45,120	56,400	67,680	4.8	1	89
147411	SMBW 4060	58	116	55,680	69,600	83,520	6.0	1	110

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

Dimensions and Performance

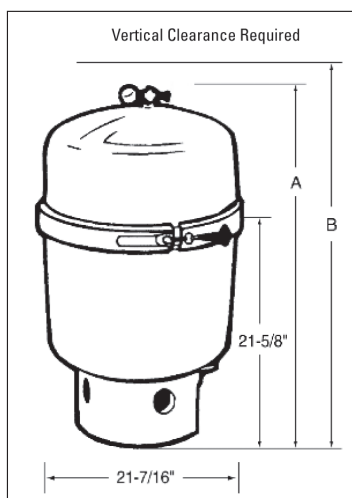

DIMENSION TABLE

MODEL	A DIM.	B DIM.
SMBW 4048	42-7/16 in.	52 in.
SMBW 4060	48-7/16 in.	58 in.

See page 341 for replacement parts.

System:2™ Modular D.E. Filters

PLD Series Filters



System:2 Modular D.E. Filter
PLD Series

Protected by U.S. Patent Numbers 5,653,831 and 6,036,853

Featured Highlights

- **Typical Installations** – Inground pools and inground hot tubs
- **Quality Construction** – Durable two-piece tank housing constructed of rugged ABS thermoplastic to ensure a long-lasting tank life
- **Easy Access** – Posi-Ring® closure provides safe, fast access to tank internals
- **Patented Design** – The patented, innovative balanced flow design first introduced with the System:3 Mod Media filter is now available in the smaller System:2 filter. Virtually maintenance-free operation for pools of all sizes
- **Low Maintenance** – Complete media coverage combined with shallow pleats means greater dirt holding capabilities, resulting in longer filter cycles and less cleaning
- **Modular Filter Tanks** – Allows for quick change of filter medias without changing the tank

Sta-Rite delivers the unique benefits of D.E. filtration in a variation of their proven modular media technology. A single replaceable grid delivers water of superior quality without the complex workings of other D.E. filters. Tank and one-piece grid design make this filter virtually maintenance-free. Contemporary style and matte black finish looks attractive in any pool setting. The small diameter footprint makes the System:2 filter a perfect fit for new and retrofit installations. Filter includes 2 in. NPT Drain ports, which are provided with reducer bushing and 1-1/2 in. drain plug.

Ordering Information

Product	Effective Filter Area (Sq. Ft.)	Flow Rated ¹ at 1–2 GPM (per Sq. Ft.)	Turnover Capacity (Gallons) (Flow Rate x 60 x Hours)			Tank Port Size	D.E. ² Required (Lbs.)	Carton Wt. (Lbs.)
			6 Hour	8 Hour	10 Hour			
SYSTEM:2 MODULAR D.E. FILTER - PLD SERIES								
PLD50	30	30–60	11–22,000	14–29,000	18–36,000	2 in.	6 ³	37
PLD70	36	36–72	13–26,000	17–35,000	22–43,000	2 in.	4	38

¹ Based on NSF recommended flow rate for commercial at 1–2 GPM per square foot.

² Do not use more D.E. than shown here. Mixed results with D.E. alternatives.

³ PLD50 requires more D.E. than the PLD70 because of precoat design and flow characteristics!

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).




System:2™ Modular D.E. Filters (Cont'd)

PLD Series Filters

Ordering Information

Product	Description	Carton Weight (Lbs.)
ACCESSORIES FOR SYSTEM:2 MODULAR D. E. FILTER - PLD SERIES		
27002-0030S	30 sq. ft. Replacement Module for PLD50	10
27002-0036S	36 sq. ft. Replacement Module for PLD70	10
U78-820P	2 in. x 1-1/2 in. Pipe Reducer Bushing	1
27001-0130S	Spring Check Valve	1

Dimensions and Performance

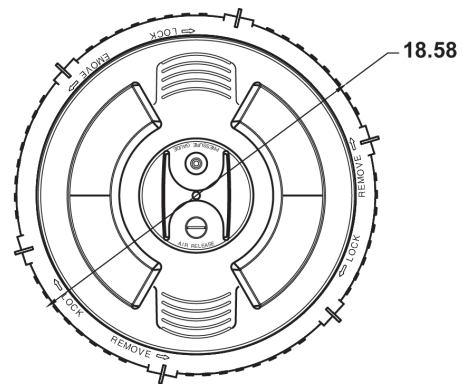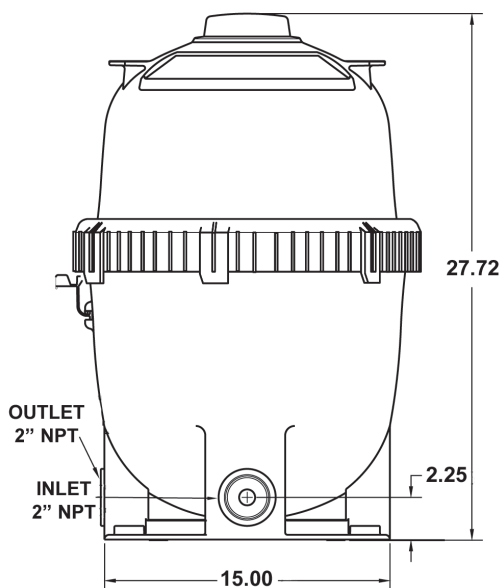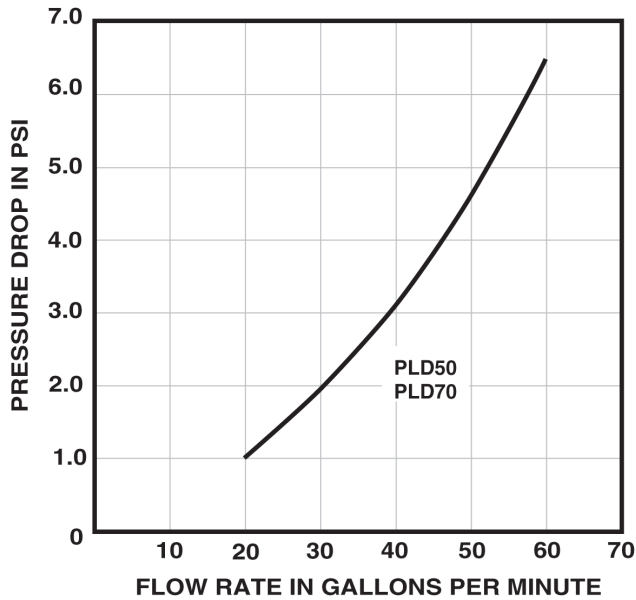

All dimensions shown in inches.

See page 351 for replacement parts.

System:2™ Modular D.E. Filters

PLDE Series Filters



System:2 Modular D.E. Filters
PLDE Series

Protected by U.S. Patent Numbers 5,653,831 and 6,036,853

Featured Highlights

- **Typical Installations** – Inground pools and inground hot tubs
- **Quality Construction** – Durable two-piece tank housing constructed of rugged ABS thermoplastic to ensure a long-lasting tank life
- **Easy Access** – Posi-Ring® locking ring provides safe, easy access to tank internals
- **Patented Design** – The innovative, balanced-flow design – first introduced with the System:3 Mod Media filter – is now available in the smaller System:2 filter. Virtually maintenance-free operation for pools of all sizes.
- **A Perfect Fit** – The small diameter footprint makes the System:2 filter a perfect fit for new and retrofit installations
- **Modular Filter Tanks** – Allows for quick change of filter medias without changing the tank plumbing

Sta-Rite delivers the unique benefits of D.E. filtration in a variation of their proven modular media technology. A single replaceable grid delivers water of superior quality without the complex workings of other D.E. filters. This innovative one-piece design is fully backwashable and can be plumbed with or without a backwash valve. 2 in. union valves are included for installations electing not to use a backwash valve. For deep-down cleaning, simply remove the filter lid and hose off in place. No more hassle of tearing down the grid assembly for cleaning and servicing. Contemporary style and matte black finish looks attractive in any pool setting.

Ordering Information

Product	Effective Filter Area (Sq. Ft.)	Flow Rated ¹ at 1–2 GPM (per Sq. Ft.)	Turnover Capacity (Gallons) (Flow Rate x 60 x Hours)			Tank Port Size	D.E. ² Required (Lbs.)	Carton Wt. (Lbs.)
			6 Hour	8 Hour	10 Hour			
SYSTEM:2 MODULAR D.E. FILTER - PLDE SERIES								
PLDE36	36	36–72	13–26,000	17–35,000	22–43,000	2 in.	5.4	38
PLDE48	48	48–96	17–34,000	23–46,000	29–57,600	2 in.	7.2	46
PLDE VALVE OPTIONS ³								
18202-0250	ABS 6-Position Valve with Union Connections – 1-1/2 in. Valve Port							5
18201-0300	ABS 6-Position Valve with Union Connections – 2 in. Valve Port							8
263053	VLV Push Pull, 7.81 in. center							

¹ Based on NSF recommended flow rate for commercial at 1–2 GPM per square foot.

² Do not use more D.E. than shown here. Mixed results with D.E. alternatives.

³ Valves must be purchased separately.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

System:2™ Modular D.E. Filters (Cont'd)



PLDE Series Filters

Ordering Information


Product	Description	Carton Weight (Lbs.)
ACCESSORIES FOR SYSTEM:2 MODULAR D.E. FILTER - PLDE SERIES		
27002-0036S	36 sq. ft. Replacement Module for PLD50, PLDE36	10
27002-0048S	48 sq. ft. Replacement Module for PLDE48	11
PKG 188	2 in. Union Half x 2 in. Slip - Package of 2	1
77703-0101	2 in. Union Half x 1-1/2 in. Slip - Package of 2	1

Dimensions and Performance

Product	For Pools Up To (Gal.) 8 Hr. Turnover	Filter Area Sq. Ft.	Original Flow Rate (GPM)	D.E. Required (Lbs.)
PLDE SERIES FILTER PERFORMANCE				
PLDE36	35,000	36	54	5.4
PLDE48	46,000	48	72	7.2

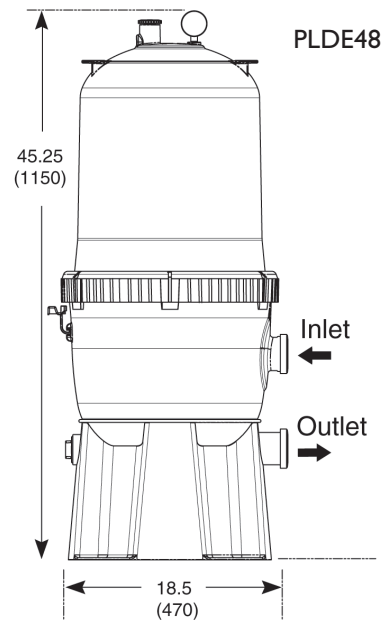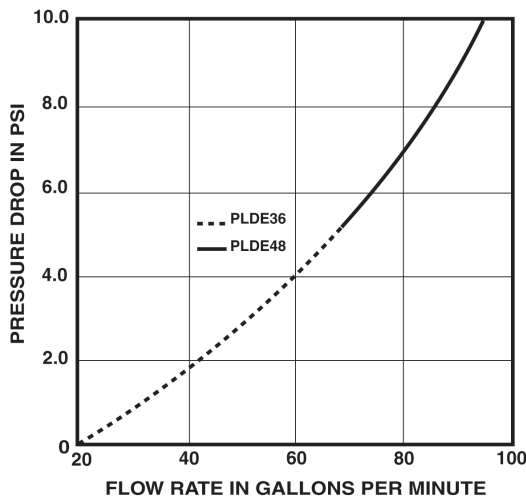

All dimensions shown in inches.

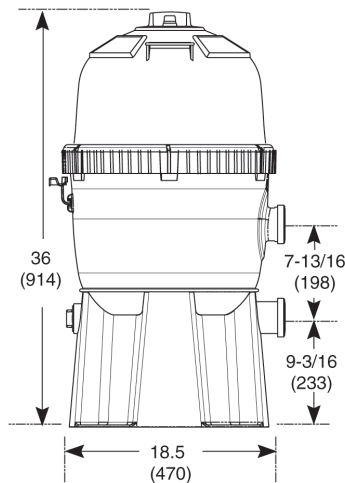

See page 352 for replacement parts.

System:3[®] D.E. Filters

SD Series Filters



System:3 D.E. Filters
SD Series

Featured Highlights

- **Typical Installations** – Inground pools, inground hot tubs, and water features
- **Quality Construction** – Durable two-piece tank housing constructed of Dura-Glas™, Sta-Rite's industry leading glass-reinforced composite resin
- **Safe** – Posi-Lok™ clamps provide safe, easy access to tank internals
- **Innovative Design** – 2 in. plumbing throughout combined with Sta-Rite's exclusive rectangular grid system provides superior D.E. filtration
- **Low Maintenance** – Superior backwash capabilities means less manual cleaning of the grids
- **Dual Drain Plugs** – Side plug assembly includes 1-1/2 in. NPT port for direct discharge plumbing
- **Sleek Looks** – Contemporary style and matte black finish looks attractive in any pool setting

D.E. is historically the media of choice for the designers of some of the largest and most beautiful pools in the world. It is now more practical for all backyard pools as well. System:3 brings you the proven performance of Sta-Rite's diatomaceous earth media in the world's safest and easiest-to-operate filter. The greater cycle times and minimized maintenance of the System:3, coupled with Sta-Rite's superior grid system, gives you the finest D.E. filter available.

Ordering Information

Product	Effective Filter Area (Sq. Ft.)	Flow Rated ¹ at 1-2 GPM (per Sq. Ft.)	Turnover Capacity (Gallons) (Flow Rate x 60 x Hours)			Tank Port Size	D.E. ² Required (Lbs.)	Carton Wt. (Lbs.)
			6 Hour	8 Hour	10 Hour			
SYSTEM:3 D. E. FILTERS - SD SERIES								
S7D75	37	37-74	13-27,000	18-36,000	22-44,000	2 in.	3.7	112
S8D110	53	53-106	19-38,000	26-51,000	32-64,000	2 in.	5.3	136
SD SERIES VALVE OPTIONS³								
18202-0150	ABS 6-Position Valve with Union Connections – 1-1/2 in. Valve Port							5
18201-0200	ABS 6-Position Valve with Union Connection – 2 in. Valve Port							8
263053	VLV Push Pull, 7.81 in. center							
ACCESSORIES FOR SYSTEM:3 MODULAR D. E. FILTER - SD SERIES								
25021-1021	DE Conversion Kit – S7D75 - Collector Assembly and Valve Sold separately							18
25021-1025	DE Conversion Kit – S8D110 - Collector Assembly and Valve Sold separately							20

¹ Based on NSF recommended flow rate for commercial at 1-2 GPM per square foot.

² Do not use more D.E. than shown here. Mixed results with D.E. alternatives.


³ Valves must be purchased separately.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 104°F (40°C).

System:3[®] D.E. Filters (Cont'd)



SD Series Filters

Dimensions and Performance

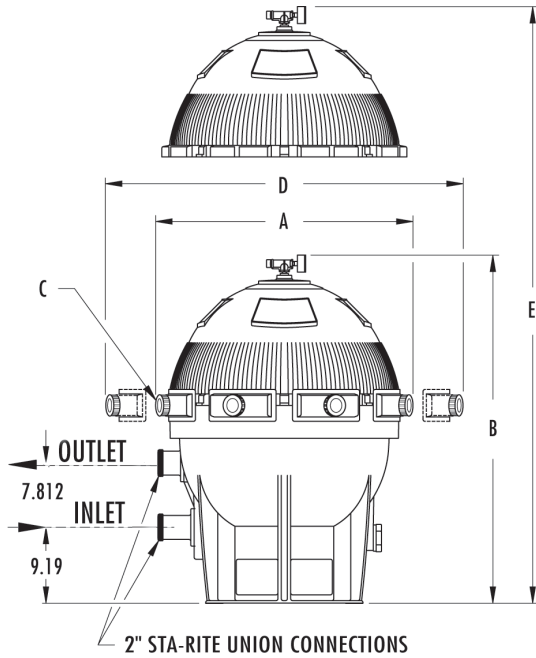


Catalog Number	DIMENSION				
	A	B	C	D	E
S7D75	28-1/2	42	7	36	50
S8D110	32-1/2	42-1/4	8	40	50

- A = width
 - B = height
 - C = number of clamps
 - D = area (width) needed to take off clamps
 - E = area (height) needed to remove top half of tank
- All dimensions shown in inches.

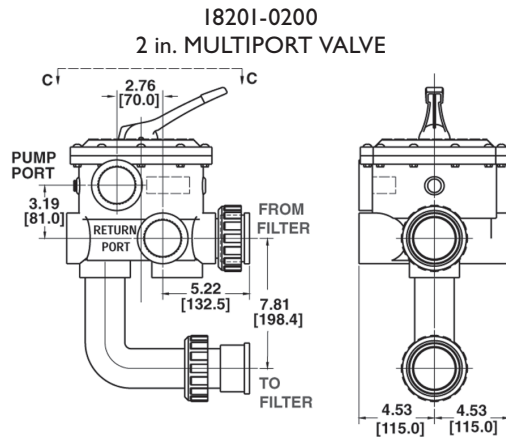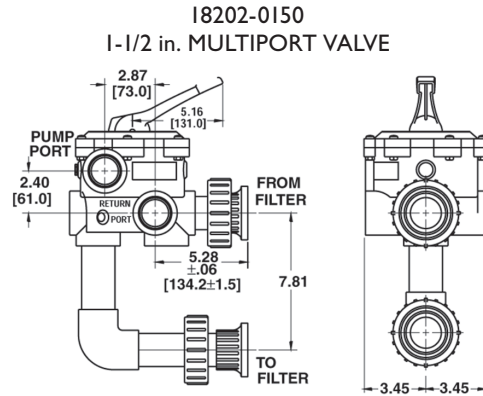

All dimensions shown in inches.

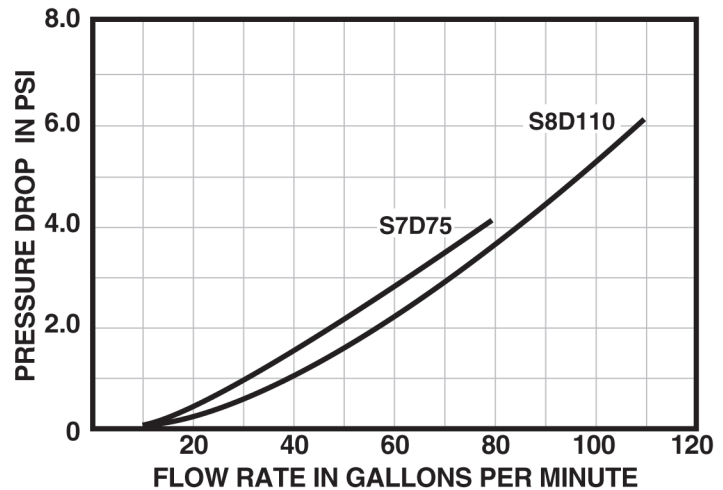

See page 353 for replacement parts.

System:3[®] Modular D.E. Filters

SMD Series Filters



System:3 Modular D.E. Filters
SMD Series
Protected by U.S. Patent Number 6,036,853



Featured Highlights

- **Typical Installations** – Inground pools, inground hot tubs, and water features
- **Quality Construction** – Durable two-piece tank housing constructed of Dura-Glas™, Sta-Rite's industry leading glass-reinforced composite resin
- **Safe** – Posi-Lok™ clamps provide safe, easy access to tank internals
- **Modular Filter Tanks** – Allows for quick change of filter medias without changing the tank
- **Low Maintenance** – Superior backwash capabilities means less manual cleaning of the grids
- **Dual Drain Plugs** – Side plug assembly includes 1-1/2 in. NPT port for direct discharge plumbing
- **Sleek Looks** – Contemporary style and matte black finish looks attractive in any pool setting

Sta-Rite is proud to bring you the proven technology of System:3 Modular Media into the world of D.E. With its perfectly balanced flow and integral manifold design, the System:3 Modular D.E. filter brings pool filtration to new heights. Available in 2 sizes, 60 and 72 sq. ft., System:3 Modular Media D.E. filtration will bring years of sparkling clear water to your customer's pool or spa. For cleaning, simply remove filter lid and hose off in place. No more hassle of tearing down the grid assembly for cleaning and servicing. The balanced flow design allows for a constant D.E. cake on the entire module, assuring full optimization of the module and longer cycles between cleanings.

Ordering Information

Product	Effective Filter Area (Sq. Ft.)	Flow Rated ¹ at 1-2 GPM (per Sq. Ft.)	Turnover Capacity (Gallons) (Flow Rate x 60 x Hours)			Tank Port Size	D.E. Required (Lbs.)	Carton Wt. (Lbs.)
			6 Hour	8 Hour	10 Hour			
SYSTEM:3 MODULAR D.E. FILTERS - SMD SERIES								
S7MD60	60	60-120	21-32,400	28-43,200	36-54,000	2 in.	9	115
S7MD72	72	72-144	25-38,880	34-51,800	43-64,800	2 in.	11	117
SMD SERIES VALVE OPTIONS								
18201-0300	ABS 6-Position Valve with Union Connections – 2 in. Port Valve							8
263053	VLV Push Pull, 7.81 in. center							
ACCESSORIES FOR SYSTEM:3 MODULAR D.E. FILTER - SMD SERIES								
25023-0160S	60 sq. ft. Replacement D.E. Element							20
25023-0172S	72 sq. ft. Replacement D.E. Element							21
PKG 188	Union x 2 in. Slip Adapter – Pkg. of 2							1
PKG 189	Union x 2 in. FPT Adapter – Pkg. of 2							1
23910-1100S	System 3 Modular D.E. Conversion Kit (replacement element required)							3



¹ Based on NSF recommended flow rate for commercial at 1-2 GPM per square foot.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Maximum operating water temperature (internal filter) 104°F (40°C).


System:3[®] Modular D.E. Filters (Cont'd)

SMD Series Filters

Dimensions and Performance

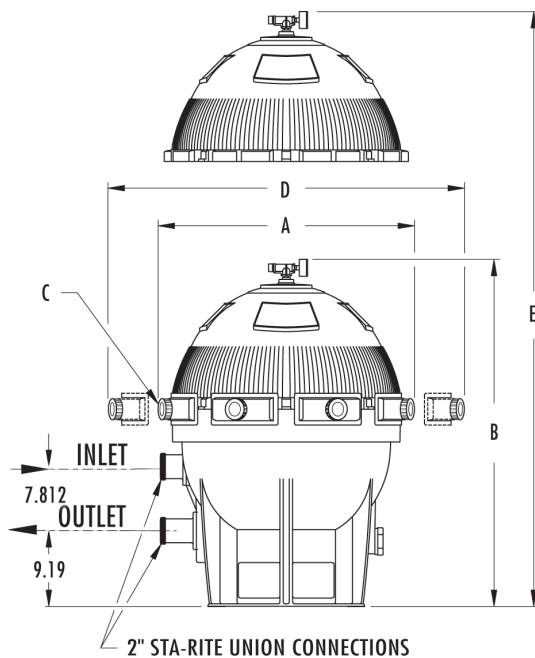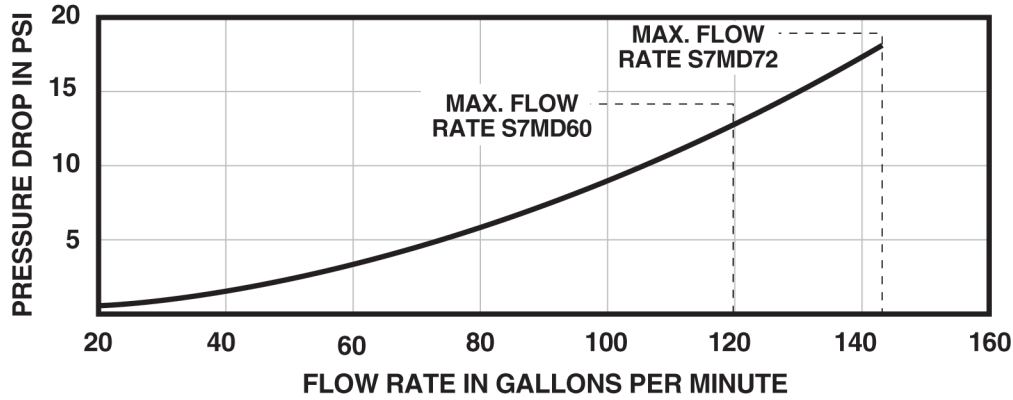

18201-0300
2 in. MULTIPORT VALVE

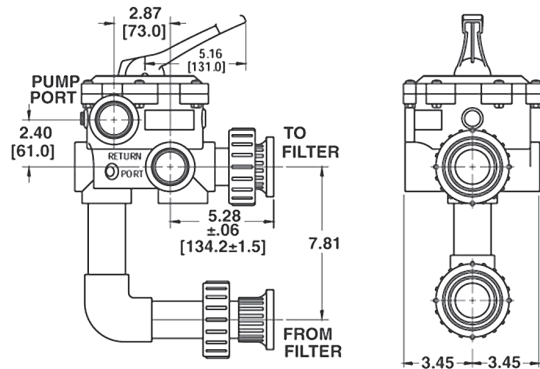

14935-0300
2 in. SLIDE VALVE

DIMENSION

Catalog Number	A	B	C	D	E
S7MD60	28-1/2	42	7	36	50
S7MD72	32-1/2	42-1/4	8	40	50

- A = width
 - B = height
 - C = number of clamps
 - D = area (width) needed to take off clamps
 - E = area (height) needed to remove top half of tank
- All dimensions shown in inches.

See page 355 for replacement parts.

Meteor® Top Mount Filters

Spherical High Rate Sand Filters with Top Mount Valves



Meteor Top Mount Filter



Featured Highlights

- The Ultimate Pressure Vessel
- Superior spherical design
- Uniform wall thickness
- 6-position top mounted multiport valve ³
- 1-1/2 inch pressure sand drain
- Base and plumbing kits now available
- Sand funnel supplied

The one piece Meteor® Top Mount filter tank is manufactured for use with a top mount multiport valve. The even flow overdrain is built into the valve body for a perfect hydraulic flow pattern. This filter incorporates the design features specified by the top 100 sand filter dealers in America.

Ordering Information


Product	Description	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM) ¹	Turnover Capacity (In Gallons)			All Sand Required (Lbs.)	Carton Qty.	Carton Wt. (Lbs.)
				8 Hour	10 Hour	12 Hour			
METEOR FILTERS									
58931800	18 in. Filter, with valve	1.8	37.5	18,000	22,500	27,000	65 ²	1	27
58931900	20 in. Filter, with valve	2.1	45	21,600	27,000	32,400	100 ²	1	28
58930000	22 in. Filter, with valve	2.5	50	24,000	30,000	36,000	150 ²	1	35

¹ Flow rates based on NSF 20 GPM per sq. ft. of filter area. Actual system flow will depend on plumbing size and other system components.

³ P/N 262506 6-way valve used on tanks manufactured after 4-1-04.

² Sand must be #20 grade silica sand or equal.

Dimensions and Performance

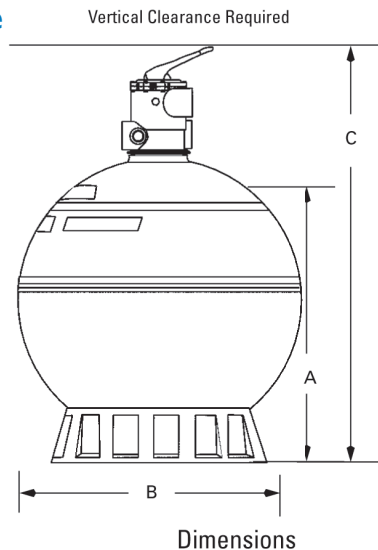

Dimension Table

Product	A Dim.	B Dim.	C Dim.
58931800	27"	18-1/2"	45"
58931900	31-1/2"	20-1/2"	45"
58930000	35"	22-1/2"	45"

See page 356 for replacement parts.

Triton® II, Tagelus® & Sand Dollar® Filters With ClearPro Technology®



Featured Highlights

- All the same, great features of the Triton® II, Tagelus® and Sand Dollar® filters
- Patent Pending lateral design
- Provides superior water quality



Triton II Filter

Tagelus Filter


Sand Dollar Filter

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Max. Press (PSI)	Flow Rate (GPM)	Flow Rate (GPM Comm)	Turnover Capacity (In Gal.)			Filter Media		All Sand Req'd (Lbs.)	Ctn Qty.	Ctn Wt. (Lbs.)
						8 Hour	10 Hour	12 Hour	Pea Gravel Required (Lbs.)	Sand Req'd (Lbs.)			
TRITON II SAND FILTERS													
140212	TR 60	3.14	50	63	63	30,240	37,800	45,360	75	250	325	1	40
TAGELUS FILTERS													
145201	TA 60D	3.1	50	60	60	28,800	36,000	43,200	N/A	N/A	325	1	30
SAND DOLLAR FILTERS													
145300	SD 80	3.5	50	75	75	36,000	45,000	54,000	N/A	N/A	350	1	76


Dimensions and Performance

Triton II Side Mount Filter

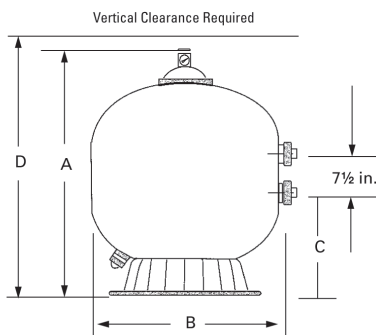


- A = 35-1/2 in.
- B = 24-1/2 in.
- C = 13-5/8 in.
- D = 37-1/2 in.

Tagelus Top Mount Filter

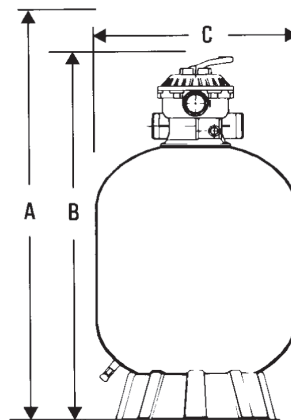

- A = 47 in.
- B = 37 in.
- C = 19-1/2 in.

Sand Dollar Top Mount Filter

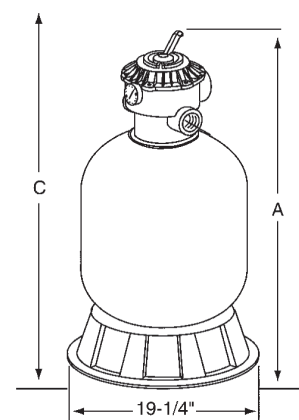

- A = 47-7/8 in.
- C = 34 in.

Sand Dollar® Top Mount Filter

Thermoplastic Tank with Clamp Style Multiport Valve



Sand Dollar Top Mount Filter

Featured Highlights


- Six-position, top-mounted multiport valve
- Combination water and sand drain makes servicing and winterizing fast and easy

The one piece Sand Dollar® filter features a clamp style, six-position multiport valve. Special lateral design provides superior flow characteristics and long filter cycles for economical operation.

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Max. Pressure (PSI)	Flow Rate (GPM)	Turnover Capacity (In Gallons)			All Sand Required (Lbs.)	Carton Qty.	Carton Wt. (Lbs.)
					8 Hour	10 Hour	12 Hour			
SAND DOLLAR FILTERS										
145315	SD 35	1.4	30	35	16,800	21,000	25,200	100	1	22
145320	SD 40	1.8	35	40	19,200	24,000	28,800	150	1	24
145322	SD 60	2.3	40	60	28,800	36,000	43,200	250	1	28
145367	SD 70	3.15	50	70	33,600	42,000	50,400	300	1	58
145333	SD 80	3.5	50	75	36,000	45,000	54,000	350	1	76

Dimensions and Performance

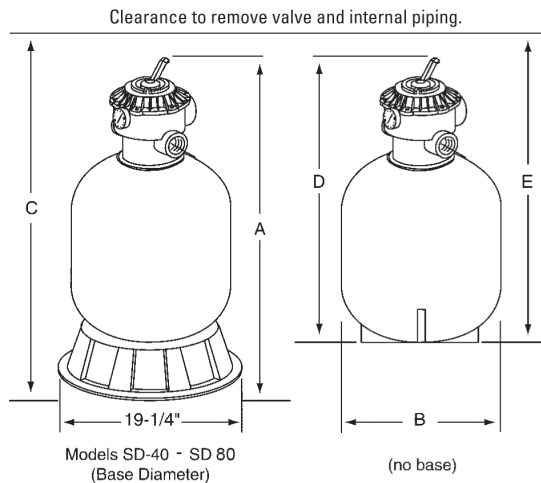

DIMENSION TABLE

MODEL	A DIM.	B DIM.	C DIM.	D DIM.	E DIM.
SD 35	31-1/2 in.	16-1/2 in.	36-3/4 in.	28-1/2 in.	33-3/4 in.
SD 40	37 in.	19-1/2 in.	46 in.	34 in.	42-7/8 in.
SD 60	38-1/2 in.	22-1/2 in.	50-1/2 in.	35-1/2 in.	47-1/2 in.
SD 70	45-1/2 in.	24 in.	73 in.	42-3/4 in.	69 in.
SD 80	47-7/8 in.	26 in.	74 in.	45-1/2 in.	71 in.

Tagelus® Top Mount Filter

Fiberglass Tank with Multiport Valve, Clamp Style



Featured Highlights

- Special lateral design provides superior flow characteristics and long filter cycles for economical operation
- Maximum Operating Pressure 50 psi
- Combination water and sand drain makes servicing and winterizing fast and easy
- 40, 50, and 60D models standard with plastic clamp

Our unique process creates a one-piece, fiberglass reinforced tank with superior strength and durability. Tagelus® filters are equipped with a six-position, clamp style, top-mounted multiport valve.




Tagelus Top Mount Filter

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM)	Turnover Capacity (In Gallons)			All Sand Required (Lbs.)	Carton Qty.	Carton Wt. (Lbs.)
				8 Hour	10 Hour	12 Hour			
TAGELUS FILTERS									
144126	TA 40D	1.8	40	19,200	24,000	28,800	175	1	30
144127	TA 50D	2.3	50	24,000	30,000	36,000	225	1	35
145241	TA 60D	3.1	60	28,800	36,000	43,200	325	1	38
145240	TA 100D	4.9	100	48,000	60,000	72,000	600	1	78

Note: Operating Limits – maximum continual Operating pressure of 50 PSI. Maximum operating water temperature (internal filter) 104°F (40°C).

Dimensions and Performance

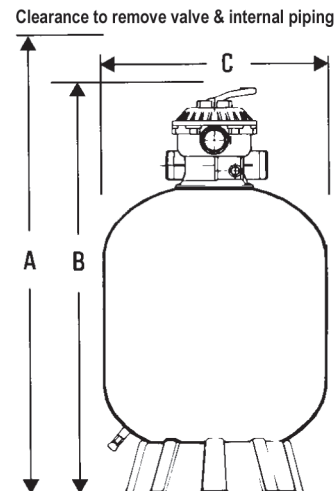

DIMENSION TABLE

MODEL	A. DIM.	B DIM.	C DIM.
TA 40D	47 in.	37 in.	19-1/2 in.
TA 50D	51-1/2 in.	39-1/2 in.	21- 1/2 in.
TA 60D	57 in.	42-1/2 in.	24-1/2 in.
TA 100D	65-1/2 in.	47- 1/4 in.	30-1/2 in.

See page 359–360 for replacement parts.

Triton® II Side Mount Filters

Fiberglass Sand Filter without Valves



Triton II Side Mount Filter

Featured Highlights

- Heavy-duty closure provides easy inspection, and features an easy-to-read pressure gauge with air relief valve
- Swing-away diffuser allows instant access to sand and all internal parts
- All internal parts are threaded for ease of service
- Internal air bleed
- Bulkhead connectors are threaded for easy installation and service
- Combination sand and water drain makes servicing and winterizing fast and easy
- Maximum Operating Pressure 50 psi

The original and still the industry standard. Our unique process creates a one-piece, fiberglass reinforced tank with UV resistant surface finish for years of unequal strength and durability. This unique method locks in fiberglass, preventing fibers from “blooming” under harsh conditions.

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM)	Flow Rate (GPM Comm)	Turnover Capacity (In Gal.)			Filter Media		All Sand Req'd (Lbs.)	Ctn Qty.	Ctn Wt. (Lbs.)
					8 Hour	10 Hour	12 Hour	Pea Gravel Req'd (Lbs.)	Sand Req'd (Lbs.)			
TRITON II SAND FILTERS												
140236	TR 40	1.92	38	38	18,240	22,800	27,360	50	125	175	1	25
140249	TR 50	2.46	49	49	23,520	29,400	35,280	50	175	225	1	34
140264	TR 60	3.14	63	63	30,240	37,800	45,360	75	250	325	1	40
140210	TR 100	4.91	98	74	47,040	58,800	70,560	150	450	600	1	65
140243	TR 140	7.06	141	106	67,680	84,600	101,520	275	650	925	1	75
TRITON II VALVE OPTIONS ¹												
261173	1-1/2 in. MPV, for sand filters (SM 10-3)										1	6
263079	2 in. PVC Slide valve w/o plumbing, for D.E. & sand filters										1	3
261049	2 in. HiFlow valve, no plumbing										1	7
261050	2 in. HiFlow w/plumbing, for sand filters										1	11
261055	2 in. MPV, for sand filters (SM 20-3)										1	10
263064	Push Pull 7-1/2 in. Center Valve, Almond PVC										1	5


¹ Valves must be purchased separately.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Maximum operating water temperature (internal filter) 104°F (40°C).

Triton® II Side Mount Filters (Cont'd)

Fiberglass Sand Filter without Valves

Dimensions and Performance

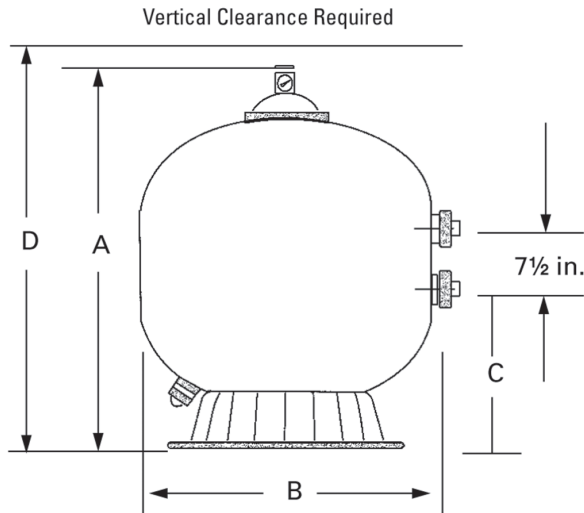

DIMENSION TABLE

MODEL	A. DIM.	B DIM.	C DIM.	D DIM.
TR 40	30-1/2 in.	19-1/2 in.	10-3/4 in.	32-1/2 in.
TR 50	34-3/4 in.	21-1/2 in.	11-7/8 in.	36-3/4 in.
TR 60	35-1/2 in.	24-1/2 in.	13-5/8 in.	37-1/2 in.
TR 100	39-3/4 in.	30-1/2 in.	16-1/4 in.	41-3/4 in.
TR 140	45-1/4 in.	36-1/2 in.	18-3/4 in.	47-1/4 in.

Cristal-Flo™ II Top-Mount Filters

High Rate Sand Filters



Cristal-Flo II Top-Mount Filters

Featured Highlights

- **Quality Construction** – Durable one-piece extra-thick molded polyethylene tank
- **Safe** – Internal air relief hole allows air to automatically escape, preventing high pressure buildup
- **6-Position Valve** – Allows you to perform all necessary water movement functions. A transparent sight-glass adapter is included
- **Large Drain Plug** – Large drain plug is easy to get at for removing and installing by hand or with tools if required
- **Sleek Looks** – Contemporary style with a textured black finish that provides superior performance in all weather conditions

For residential inground or aboveground swimming pools requiring turnover through 59,000 gallons, at flow rates up to 20 GPM for 8 to 10 hours. Permanent media high rate sand filters in 16 in., 19 in., 22 in., 24 in. and 26 in. diameter models accommodate large and small pools, offering the best combination of economy, performance, durability and ease of maintenance. Corrosion-resistant, one-piece, extra-thick molded polyethylene tank assures long service life. Top-mounted, corrosion-resistant multiport selector valve included. Also includes a convenient tank winterizing drain and continuous air relief system.


Ordering Information

Product	Effective Filtration Area (Sq. Ft.)	Max. Pressure (PSI)	Flow Rate (GPM)	Turnover Capacity (In Gallons)			All Sand Required (Lbs.)	Carton Qty.	Carton Wt. (Lbs.)
				8 Hour	10 Hour	12 Hour			
CRISTALFLO II FILTERS									
145359	1.4	30	35	16,800	21,000	25,200	100	1	22
145360	1.8	35	40	19,200	24,000	28,800	150	1	24
145361	2.3	40	60	28,800	36,000	43,200	250	1	28
145362	3.15	50	70	33,600	42,000	50,400	300	1	58
145363	3.5	50	75	36,000	45,000	54,000	350	1	76

Cristal-Flo™ II Top-Mount Filters (Cont'd)

High Rate Sand Filters

Dimensions and Performance

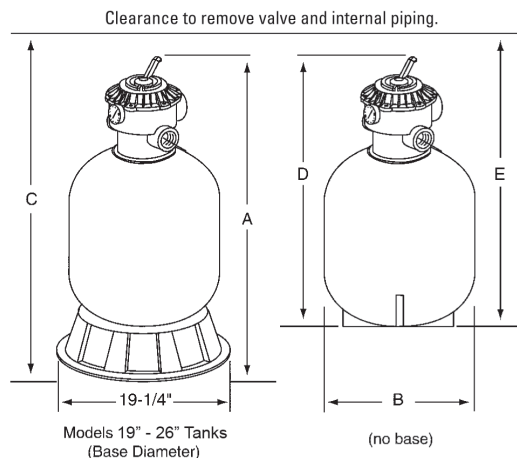


DIMENSION TABLE

MODEL	A DIM.	B DIM.	C DIM.	D DIM.	E DIM.
145359	31-1/2 in.	16-1/2 in.	36-3/4 in.	28-1/2 in.	33-3/4 in.
145360	37 in.	19-1/2 in.	46 in.	34 in.	42-7/8 in.
145361	38-1/2 in.	22-1/2 in.	50-1/2 in.	35-1/2 in.	47-1/2 in.
145362	45-1/2 in.	24 in.	73 in.	42-3/4 in.	69 in.
145363	47-7/8 in.	26 in.	74 in.	45-1/2 in.	71 in.

System:3[®] Sand Filters

SS Series Filters

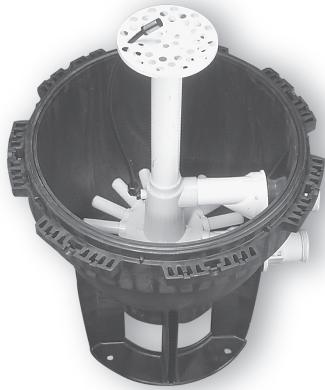

System:3 Sand Filters
SS Series

Featured Highlights

- **Typical Installations** – Inground pools, inground hot tubs, and water features
- **Quality Construction** – Durable two-piece tank housing constructed of Dura-Glas™, Sta-Rite's industry leading glass-reinforced composite resin
- **Innovative Design** – The innovative design of the System:3 tank combined with the lateral/hub assembly produces a balanced flow of water and deeper sand bed penetration
- **Low Maintenance** – The deep sand bed holds more dirt, resulting in longer filter cycles and less cleaning
- **Dual Drain Plugs** – Side plug helps make sand removal easy, while the bottom plug comes with integral screen for easy draining without the loss of sand
- **Sleek Looks** – Contemporary style and matte black finish looks attractive in any pool setting

System:3 brings you the proven performance of Sta-Rite's sophisticated sand filter hydraulics in the world's safest and easiest-to-operate filter. Highly efficient, its sophisticated design yields a uniform flow pattern through a deeper sand bed than any other. Modular filter tanks allows for quick change of filter medias without changing the tank. Contemporary style and matte black finish looks attractive in any pool setting.

Ordering Information

Product	Filter Area (Sq. Ft.)	Flow Rated ¹ at 15–20 GPM (per Sq. Ft.)	Turnover Capacity (Gallons) (Flow Rate x 60 x Hours)			Tank Port Size	Sand ² Required (Lbs.)	Carton Wt. (Lbs.)
			6 Hour	8 Hour	10 Hour			
SYSTEM:3 SAND FILTERS - SS SERIES								
S7S50	2.4	36–48	13–17,000	17–23,000	22–29,000	2 in.	200	103
S8S70	3.4	51–68	18–25,000	25–33,000	31–41,000	2 in.	300	121
SS SERIES VALVE OPTIONS ³								
18202-0150	ABS 6-Position Valve with Union Connections – 1-1/2 in. Valve Port							5
18201-0200	ABS 6-Position Valve with Union Connections – 2 in. Valve Port							8
263053	VLV Push Pull, 7.81 in. center							
ACCESSORIES FOR SS SERIES								
25021-2021	Sand Conversion Kit – S7S50 - Collector Assembly and Valve Sold Separately							5
25021-2025	Sand Conversion Kit – S8S70 - Collector Assembly and Valve Sold Separately							6

¹ Based on NSF recommended flow rate for commercial at 15–20 GPM per square foot.

² Use only #20 white quartz silica sand, size range 0.40–0.55 mm; 12 in. to 15 in. sand bed depth required.


³ Valves must be purchased separately.

Note: Operating Limits – maximum continual operating pressure of 50 PSI. Pool/Spa (bather) applications, maximum water temperature (internal filter) 104°F (40°C).

System:3[®] Sand Filters (Cont'd)



SS Series Filters

Dimensions and Performance

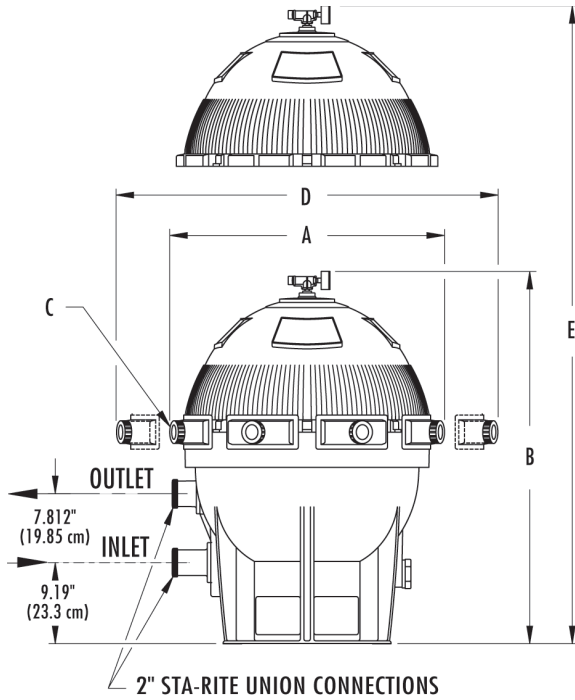


Catalog Number	DIMENSION				
	A	B	C	D	E
S7S50	28-1/2	42	7	36	50
S8S70	32-1/2	42-1/4	8	40	50

- A = width
 - B = height
 - C = number of clamps
 - D = area (width) needed to take off clamps
 - E = area (height) needed to remove top half of tank
- All dimensions shown in inches.

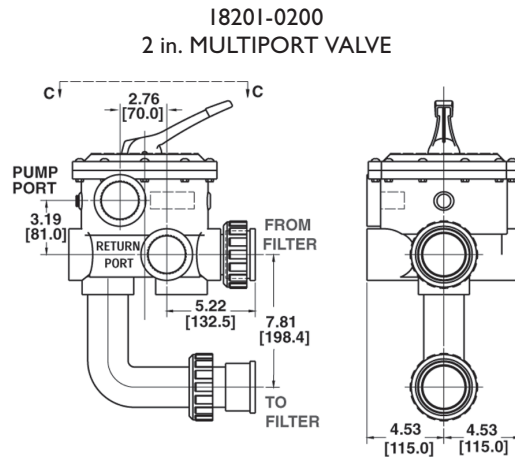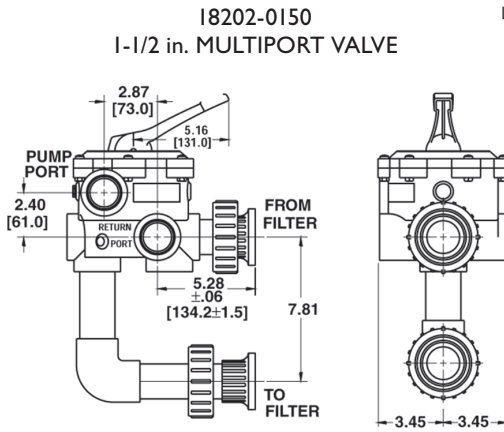

All dimensions shown in inches.

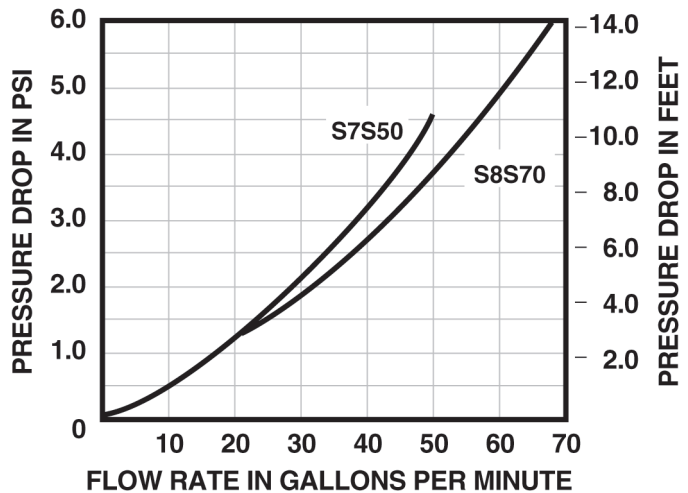

See page 365 for replacement parts.

THS Series® Horizontal Sand Filter



THS Horizontal Sand Filter

Featured Highlights

- Five sizes to 27 sq. ft.
- Manway in front for easy access and smaller footprint
- Manway with viewport available as option
- 6 in. flanged connections, 4 in. victaulic on the THS 3461
- Optional manual, semi-automatic, and automatic backwash systems for one and two tank systems
- Two backwash controllers to choose from
- Influent manifold distribution to prevent clogging
- NSF approved from 5–20 gpm/sq. ft.

The THS Filter is an NSF-approved 50 psi rated tank with flow rates up to 535 gallons per minute. The filter shell is manufactured from a unique and lasting composite laminate design that makes winding unnecessary. Paracote®, a waterbased, environmentally-friendly coating, provides remarkable surface protection.

Ordering Information

Product	Model	Description	Effective Filtration Area (Sq. Ft.)	Flow Rate (15 GPM/ Sq. Ft.)	6 Hour Turnover Capacity (In Gallons)	Filter Media		All Sand Required (Lbs.)	Carton Wt. (Lbs.)
						Pea Gravel Required (Lbs.)	Sand Required (Lbs.)		
THS HORIZONTAL FILTER									
143461	THS3461	THS 34 in. x 61 in.	13.5	203	73,080	300	1250	1550	550
143484	THS3484	THS 34 in. x 84 in.	19.0	285	102,600	600	1350	1950	610
144272	THS4272	THS 42 in. x 72 in.	19.7	295	106,200	500	2100	2600	650
144284	THS4284	THS 42 in. x 84 in.	23.2	348	125,280	600	2400	3000	725
144296	THS4296	THS 42 in. x 96 in.	26.7	400	144,000	700	2800	3500	800
CONTROLLERS (MUST USE WITH DIAPHRAGM VALVES MANIFOLD KITS)									
156400	Single THS manual controller 6 in. FP				CS400-01	CS400 backwash controller for single tank system			
156450	Dual THS manual controller 6 in. FP				CS400-02	CS400 backwash controller for dual tank system			
156800	Dual THS CA100 autbackwash controller								
156850	Single THS CA100 autbackwash controller								



Multiport Gauge Panel

CM200 Manual Backwash Controller

This is the simplest option. No electronics or programming required. Simply turn the knob to backwash each tank in the system.

CS 400 Commercial Backwash Controller

This controller is programmable and controls every aspect of the backwash cycle once initiated. Backwash can be initiated three ways: by an operator with the touch of a button, by a signal from a master controller (such as the AK600), or by a signal from an optional differential pressure switch (CS400-DP). Stored backwash data and history, alarms, and calculated backwash cycle times are also features of the CS400 controller, as are relays for communication with the heater, pump and Acu-drive.

CA 100 Fully Automatic Backwash Controller

This is the most comprehensive backwash controller and can be readily reprogrammed to initiate backwash automatically based on differential pressure (integral pressure transducers are standard), time (internal seven-day clock with battery back-up is standard), flow (with optional flow sensor), or any combination of the above. The controller has real-time display of operation mode, filter flow rate, and water temperature (with optional temperature probe). Also, includes Energy Saver Mode for simple On/Off pump scheduling and various interlocks and relays to communicate with other equipment (pump, heater, Acu-drive).



THS Series® Horizontal Sand Filter (Cont'd)

MANIFOLD KITS AND ACCESSORIES			
140325	Adder kit for third THS Filter ²	155721	THS dual 34 x 84 in. 6 in. FP kit with diaphragm valves
156100	Temperature probe kit ⁴	155723	Kit-THS3461, dual tank manifold, with diaphragm valve kit
156150	Flowmaster saddle kit ⁴	155730	THS dual 42 in. dia. 6 in FP Kit with diaphragm valves
155700	THS single tank manifold kit with butterfly valves ³	155800	WA-KIT wedge anchor kit ¹
155702	Kit-THS3461, single tank manifold, with butterfly valve kit ³	155850	BVA-KIT 1/2 in. ball valve adapter kit for manual air relief ¹
155720	THS dual tank manifold kit with butterfly valves ³	155705	Manway with Viewport upgrade - at time of purchase
155722	Kit-THS3461, dual tank manifold, with butterfly valve kit ³	155706	Manway with Viewport Retrofit Kit - replace existing in field
155701	THS single tank 6 in. FP kit with diaphragm valves	CS400DP	Mounted differential pressure switch ⁵
155703	Kit-THS3461, single tank manifold, with diaphragm valve kit	B4110	120v to 24v 100w transformer


¹ One each per tank purchased if required.

² Adder Kit provides 6 in., SCH 80 manifold piping, fittings and hardware for the addition of a third THS filter of equal diameter only when #155720 Dual-Filter Butterfly Valve Face Piping Kit is used. Note: Using a 6 in. Schedule 80 plumbing kit with flows in excess of 812 GPM exceeds the maximum water velocity recommended in ANSI/NSPI-I 2003 Standard for Public Swimming Pools. For higher flows, summary calculations should be provided to show that the greater flow is possible with the pump and piping provided.

³ Does not require a purchase of a controller.

⁴ Only used with controller option.

⁵ Only available with CS400 controller.

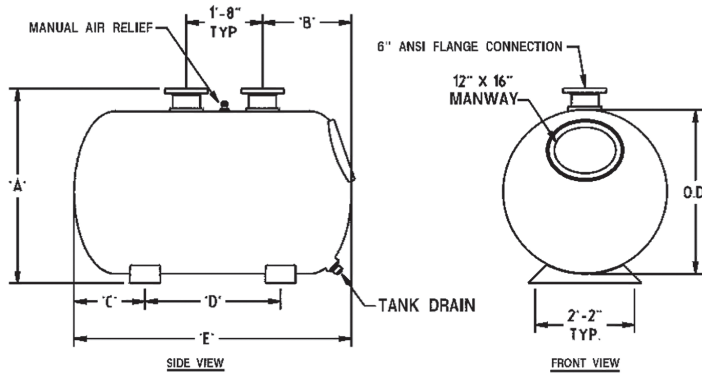


* 4 in. victaulic on THS3461

Dimensions and Performance



THS SERIES SPECIFICATION CHART							
Model	Tank Dimensions						WT
	"A" in.	"B" in.	"C" in.	"D" in.	"E" in.	"O.D." in.	
THS3461	39-1/2	21	16	30	62	35	550
THS3484	45	21-1/4	24-5/8	35-1/4	85	35	610
THS4272	52-1/4	23-1/4	18-7/8	35-1/4	73	43	650
THS4284	52-1/4	23-1/4	24-7/8	35-1/4	85	43	725
THS4296	52-1/4	23-1/4	30-7/8	35-1/4	97	43	800

NSF-approved for 5–20 gpm/sq. ft.

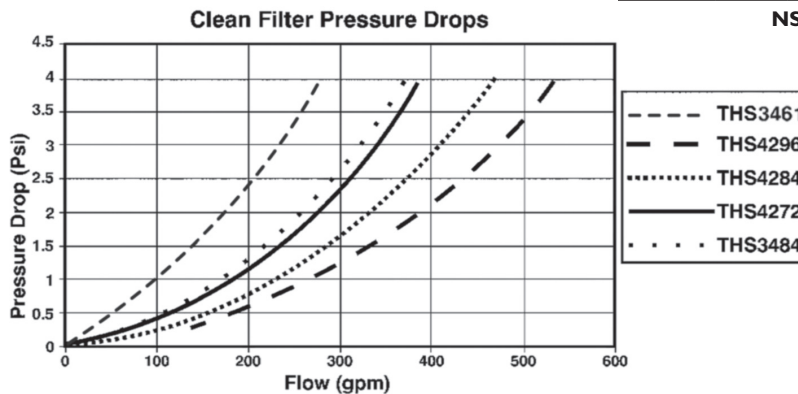

See page 370 for replacement parts.

Triton[®] HD Side Mount Filters

Heavy-Duty Fiberglass Sand Filter without Valves



Triton HD Filter

Featured Highlights

Maximum Operating Pressure 75 psi

All the same great performance and features of the original Triton[®] with maximum operating pressure of 75 psi for those special high pressure installations such as single pump in-floor cleaning systems.

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM Res)	Flow Rate (GPM Comm)	Turnover Capacity (In Gallons)			Filter Media		All Sand Req'd (Lbs.)	Carton Wt. (Lbs.)
					8 Hour	10 Hour	12 Hour	Pea Gravel Required (Lbs.)	Sand Required (Lbs.)		
TRITON HD SAND FILTER											
140335	TR100 HD	4.91	98	74	47,040	58,800	70,560	150	450	600	66
TRITON HD VALVE OPTIONS ¹											
263079	2 in. PVC slide valve w/o plumbing, for D.E. & sand filters										3
261049	2 in. HiFlow valve, no plumbing										7
261050	2 in. HiFlow valve w/plumbing, for sand filters										11
261055	2 in. MVP, for sand filters (SM 20-3)										10
261173	1-1/2 in. MVP, for sand filters (SM 10-3)										6
263034	Push Pull 7-1/2 in. Center Valve, Almond PVC										5


¹ Valves must be purchased separately.

Dimensions and Performance



DIMENSION TABLE

MODEL	A. DIM.	B DIM.	C DIM.	D DIM.
TR100 HD	39-3/4 in.	30-1/2 in.	16-1/4 in.	41-3/4 in.

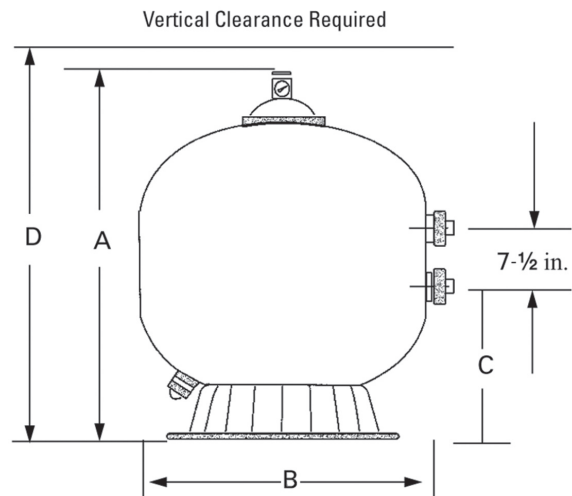

Triton® C and Triton C-3

High Capacity Fiberglass Side Mount Sand Filter without Valves



Featured Highlights

- Maximum Operating Pressure 50 psi
- Full 2 in. Drain
- 8 in. opening for easy access to sand bed
- The Triton C-3 features standard 3 in. flange connections
- TR 100C-3 & TR 140C-3 models are available in black only

This filter series features multiple diverters for increased filtration rates in commercial applications up to 20 GPM/sq. ft.



TR 140C-3



TR 100 C

Ordering Information

Product	Model	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM Res) ²	Flow Rate (GPM Comm) ³	Turnover Capacity (In Gal.) ⁴			Filter Media		All Sand Req'd (Lbs.)	Ctn Qty.	Ctn Wt. (Lbs.)
					6 Hour	8 Hour	10 Hour	Pea Gravel Req'd (Lbs.)	Sand Req'd (Lbs.)			
TRITON C SAND FILTERS												
140315	TR 100C-Almond	4.91	98	74	26,640	35,520	44,400	150	450	600	1	70
140316	TR 140C-Almond	7.06	141	106	38,160	50,880	63,600	275	650	925	1	82
TRITON C-3 SAND FILTERS												
140310	TR 100C-3-Black only	4.91	98	74	26,640	35,520	44,400	150	450	600	1	65
140342	TR 140C-3-Black only	7.06	141	106	38,160	50,880	63,600	275	650	925	1	82
TRITON C VALVE OPTIONS¹												
261050	2 in. HiFlow w/plumbing, for sand filters										1	11
261055	2 in. MPV, for sand filters (SM 20-3)										1	10
263010	Full-Flow valve, sand filters (will only work on the TR100C and TR140C models)										1	7


¹ Valves must be purchased separately.

² Based on 20 gpm per sq. ft.

³ Based on 15 gpm per sq. ft.

⁴ Based on 15 gpm per sq. ft.

Dimensions and Performance

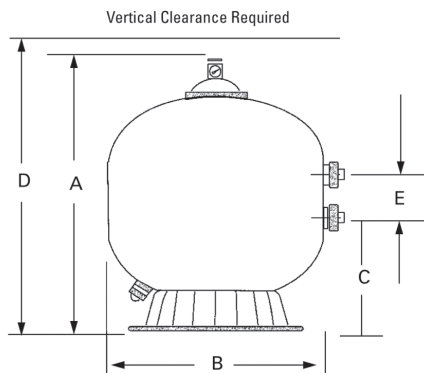

DIMENSION TABLE

MODEL	A. DIM.	B DIM.	C DIM.	D DIM.	E DIM.
TR 100 C	39¾ in.	30½ in.	16½ in.	43¾ in.	7½ in.
TR 140 C	45¾ in.	36½ in.	18¾ in.	49¾ in.	7½ in.
TR 100 C-3	39¾ in.	30½ in.	16-1/16 in.	43¾ in.	7.72 in.
TR 140 C-3	45¾ in.	36½ in.	18½ in.	49¾ in.	7.72 in.



See page 368 for replacement parts.

D.E. Separation Tank



D.E. Separation Tank

Featured Highlights

- A variety of surge chamber float valves are available to fit your needs
- 4 in. through 12 in. sizes available

Efficient removal of spent D.E. and debris from backwash water – allows a closed loop system which returns backwash water to the pool. Constructed of glass-reinforced thermoplastic for years of corrosion-free performance. Eliminates disposal problems for D.E. material.


Ordering Information

Product	Pipe For Filters	Connections	Carton Wt. (Lbs.)
D.E. SEPARATION TANK			
60SEP	To 60 sq. ft.	1-1/2 in. NPT	25
D.E. SEPARATION TANK VALVE OPTIONS¹			
I3600-0004	4 in. Surge Chamber Float Valve		13
I3600-0006	6 in. Surge Chamber Float Valve		15
I3600-0008	8 in. Surge Chamber Float Valve		19
I3600-0009	10 in. Surge Chamber Float Valve		21
I3600-0042	12 in. Surge Chamber Float Valve		23

¹ Valves must be purchased separately.

Note: Separation tanks include polypropylene bag, air relief plug and clamp assembly.


Dimensions and Performance

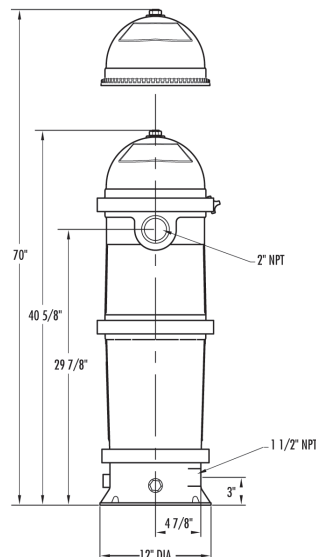

See page 371 for replacement parts.

Sch 40 & 80 for TRI00C, TRI40C, TRI00C-3 & TRI40C-3

Tandem Filter Piping Kits for 2 & 3 in. Filters

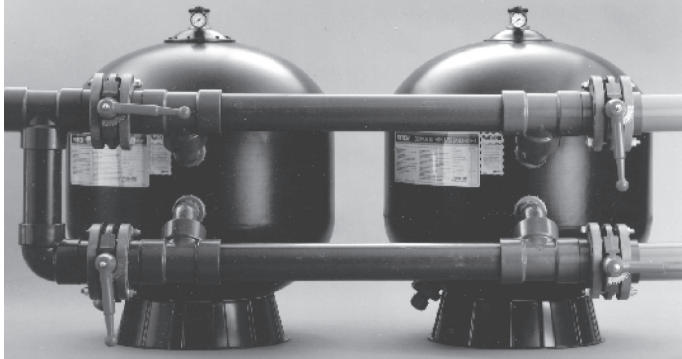

These Tandem Filter Piping Kits are designed specifically for use with the Triton TRI00C, TRI40C, Triton TRI00C-3 and TRI40C-3 sand filters to make the best even better.

We are providing this additional service for your convenient one-stop shopping. Pipe and filters are all you need.

Tandem Filter Piping Kits for Triton TRI00C, TRI40C, TRI00C-3 and TRI40C-3 Sand Filters

Ordering Information

Product	Model
For Plumbing Two TRI00C or TRI40C Filters	
I46400	3 in. Two filter kit, SCH 40 (200 GPM)
I46402	4 in. Two filter kit, SCH 40 (300 GPM)
I46404	6 in. Two filter kit, SCH 40 (700 GPM)
I46403	4 in. Two filter kit, SCH 80 (300 GPM)
I46405	6 in. Two filter kit, SCH 80 (700 GPM)
For Plumbing Two TRI00C-3 or TRI40C-3 Filters	
I47400	3 in. Two filter kit, SCH 40 (200 GPM)
I47402	4 in. Two filter kit, SCH 40 (300 GPM)
I47404	6 in. Two filter kit, SCH 40 (700 GPM)
I47401	3 in. Two filter kit, SCH 80 (200 GPM)
I47403	4 in. Two filter kit, SCH 80 (300 GPM)
I47405	6 in. Two filter kit, SCH 80 (700 GPM)

Product	Model
Adder Kits for TRI00C and TRI40C Filters ¹	
I46406	4 in. Single filter kit, SCH 40
I46408	6 in. Single filter kit, SCH 40
I46407	4 in. Single filter kit, SCH 80
I46409	6 in. Single filter kit, SCH 80
Adder Kits for TRI00C-3 and TRI40C-3 Filters	
I47406	4 in. Single filter kit, SCH 40
I47408	6 in. Single filter kit, SCH 40
I47407	4 in. Single filter kit, SCH 80
I47409	6 in. Single filter kit, SCH 80

Note: All kits all hardware, fittings, gaskets and butterfly valves. TRI00C-3 and TRI40C-3 Kits include all hardware, gaskets and Butterfly valves.

Filters	Filter Area Sq. Ft.	Manifold Pipe Dia.	Filter Rate Sq. Ft.		Turnover Capacity		
			15 GPM	20 GPM	6 Hours	8 Hours	10 Hours
TANDEM TRITON I40C FILTER INSTALLATION							
6 TR I40's	42.36	6 in.	635	—	228,600	304,800	381,000
		8 in.	—	847	304,920	406,560	508,200
7 TR I40's	49.42	6 in.	741	—	266,760	355,680	444,600
		8 in.	—	988	355,680	474,240	592,800
8 TR I40's	56.48	8 in.	847	—	304,920	406,560	508,200
		8 in.	—	1130	406,800	542,400	678,000

Sch 40 & 80 for TRI00C, TRI40C, TRI00C-3 & TRI40C-3 (Cont'd)

Tandem Filter Piping Kits for 2 & 3 in. Filters

Filters	Filter Area Sq. Ft.	Manifold Pipe Dia.	Filter Rate Sq. Ft.		Turnover Capacity		
			15 GPM	20 GPM	6 Hours	8 Hours	10 Hours
TANDEM TRITON TRI00C AND TRI00C-3 FILTER INSTALLATION							
2 TR 100's	9.82	3 in.	147	—	52,920	70,560	88,200
		4 in.	—	196	70,560	94,080	117,600
3 TR 100's	14.73	4 in.	221	—	79,560	106,080	132,600
		4 in.	—	295	106,200	141,600	177,000
4 TR 100's	19.64	4 in.	295	—	106,200	141,600	177,000
		5 in.	—	393	141,480	188,640	235,800
5 TR 100's	24.55	5 in.	368	—	132,480	176,640	220,800
		5 in.	—	491	176,760	235,680	294,600
TANDEM TRITON TRI40C AND TRI40C-3 FILTER INSTALLATION							
2 TR 140's	14.12	4 in.	212	—	76,320	101,760	127,200
		4 in.	—	282	101,520	135,360	169,200
3 TR 140's	21.18	4 in.	318	—	114,480	152,640	190,800
		5 in.	—	424	152,640	203,520	254,400
4 TR 140's	28.24	5 in.	424	—	152,640	203,520	254,400
		6 in.	—	565	203,040	270,720	338,400
5 TR 140's	35.30	5 in.	530	—	190,800	254,400	318,000
		6 in.	—	706	254,160	338,880	423,600

Dimensions and Performance

Two Filter System	A	B	C	D	E	F	G	H	I	J	K	Total Wt.
3 in.—TRI00C	82-3/8 in.	17-15/16 in.	48 in. min.	18 in. min.	39-3/4 in.	15 in.	29-33/64 in.	8-5/8 in.	11-1/32 in.	51-13/16 in.	—	2300 lbs.
3 in.—TRI40C	88-3/8 in.	17-15/16 in.	54 in. min.	18 in. min.	45-1/4 in.	18 in.	32-33/64 in.	8-5/8 in.	13-15/32 in.	57-13/16 in.	—	3200 lbs.
4 in.—TRI40C	95-3/4 in.	19-35/64 in.	54 in. min.	18 in. min.	45-1/2 in.	18 in.	33-1/8 in.	9-15/16 in.	12-21/32 in.	59-11/64 in.	—	2300 lbs.
6 in.—TRI40C*	111-3/4 in.	24-7/32 in.	54 in. min.	18 in. min.	45-1/2 in.	18 in.	35-3/8 in.	12-13/16 in.	10-21/64 in.	64-13/32 in.	64-53/64 in.	3550 lbs.

* 6 in. piping needs to be rotated upward as shown at 25° so handle will clear the floor.

FIGURE 4A


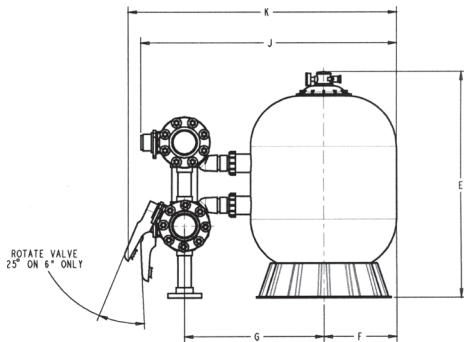


FIGURE 4B

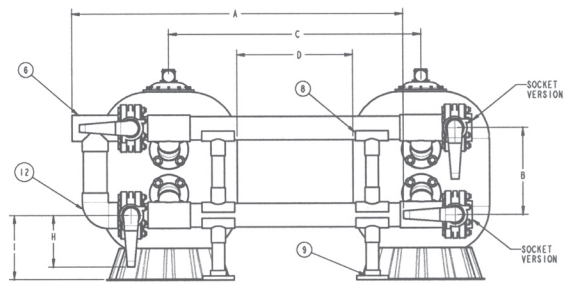

Plumbing Kits & Accessories

Featured Highlights

- Unionized pump/filter plumbing kits and base
- Bulkhead Union Sets can connect D.E. and high-rate sand filters to any plumbing. The kit consists of two half unions with both 1-1/2 and 2 in. pipe connections.



50901600



154566

Ordering Information

Product	Description	Carton Qty.	Carton Wt. (Lbs.)
UNIONS			
98960311	Bulkhead union kit, 1-1/2 in. & 2 in. for Eclipse Filters	1	0.5
SIGHT GLASS			
50901600	Sight glass, 1-1/2 in. socket	1	0.5
TOOLS			
010126	Filter lid opener ¹	1	1
192019	Drain plug wrench ¹	1	1
ACCESSORIES AND KITS			
154566	2 in. Sight glass nipple, clear	1	1
185208	Plumbing kit, NS/FNS/CH, for use with Slide valve & Challenger, without valve	1	18
271092	2 in. Threaded adapter kit, for installations without valve, 2 required	1	3
271094	1-1/2 in. Threaded adapter kit, w/o valve, for installations without valve, 2 required	1	3
271096	1-1/2 & 2 in. Threaded adapter kit, for installations without valve, 2 required	1	3
274725	Union check valve, 2 in. socket	1	2
354570	1-1/2 in. Quick disconnect kit, for Regenerative D.E. Filter	1	2
542090	Sand Vac, empties a sand filter in 10 minutes for repair, refilling, or removal	1	3

¹ For use on FNS Plus, Nautilus Plus & Clean & Clear Plus filters.

² For use on Star filters.

³ Torque wrench not required for filters with Tension Control™ clamp.



542090



354570
(now available in black)



274725



185208



271094, 271096,
271092

Retro-Fit & Upgrade Kits

Ordering Information

Product	Description
FNS KITS ¹	
181010	FNS clamp spring kit (works on all FNS clamps after 1-89)
181020	FNS 24/36 black top w/spring clamp assembly w/ air relief
181021	FNS 48 black top w/spring clamp assembly w/ relief
181022	FNS 60 black top w/spring clamp assembly w/ air relief
181030	FNS 24/36 tan top w/spring clamp assembly w/ air relief
181031	FNS 48 tan top w/spring clamp assembly w/ air relief
181032	FNS 60 tan top w/spring clamp assembly w/ air relief
NS KITS ¹	
181011	NS/PF35 spring clamp assembly
181013	NS/PF35 spring clamp assembly w/ air relief ²
188528	NS36 top w/spring clamp assembly w/ air relief ³
188529	NS48/72 top w/spring clamp assembly w/ air relief ³
181018	NS60 (prior to 12/91) top w/ spring clamp assembly w/ air relief ³
188530	NS60 (after 12/91) top w/spring clamp assembly w/ air relief ³

Product	Description
NSP TANK REPLACEMENT KITS ¹	
188528	Kit NS/NSP-36 tank kit
188529	Kit NS/NSP-48 tank kit
188530	Kit NS/NSP-60 tank kit
188531	Kit NS/NSP-72 tank kit
PF SAND KITS ¹	
181011	NS/PF35 spring clamp assembly
181013	NS/PF35 spring clamp assembly w/ air relief ⁴
181034	PF50 spring clamp assembly w/ air relief ⁴
FILTER UPGRADES	
98209804	High flow manual air relief valve w/instruction labels
98201300	Tension Control™ clamp for s/s filters ⁵
59000400	High flow internal air relief kit upgrade for Titan manifold
51999100	High flow internal air relief kit upgrade for Eclipse ⁶
55020800	High flow internal air relief kit upgrade for 26, 30 & 36 in. Eclipse, S.M. ⁶

¹ For filters manufactured prior to 1991.

² Based upon availability.

³ Replaced by Nautilus Plus NSP kits. Kit includes top, tank, and clamp assembly.

⁴ Tank top air relief opening may require additional machining. See instructions.


⁵ For use on filters built before 11-94.

⁶ For use on filters built after 11-94.

⁷ For use on filters built before 7-93


Filter Base Kits

Base Kits for D.E. and/or Sand Filters




180010 - Elevated Base, Pump to Valve Plumbing Parts, and Mounting Hardware.

Use with FNS Plus Filters and Challenger Pumps with Slide Valve.



180020 - Elevated Base, Pump to Valve Plumbing Parts, and Mounting Hardware.

Use with FNS Plus Filters and Multiport Valves and Challenger, WhisperFlo or Pinnacle Pumps. Does not include a valve.



185201 - Skid Base. Pump to Filter Plumbing Parts, 2 in. Valve, and Mounting Hardware.

Ordering Information

Product	Description	Carton Qty.	Carton Wt. (Lbs.)
ELEVATED BASE KITS			
180010	Base kit FNS Plus/CH/Slide, used for mounting FNS Plus and Slide Valves with Challenger Pump	1	18
180020	Base kit FNS Plus/1.5 MPV/CH/PINN/WF, used for mounting FNS Plus Filters and Multiport Valves with Challenger, WhisperFlo or Pinnacle Pump (does not include Valve)	1	18
185201	Base kit NS/CH/Slide, used for mounting NS/FNS Filters and Slide Valves with Challenger Pump	1	18